




共通规格	
精度等级	KHK R 001 4级
齿形	全齿高齿
压力角	20°
材料	S45C
热处理	—
齿面硬度	(HB210 以下)
表面处理	黑色表面氧化

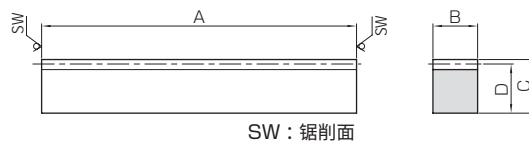

R1

产品型号	模数	有效齿数	形状	全长				容许传动力 (N)		容许传动力 (kgf)		侧隙 (mm)	质量 (kg)
				A	B	高度 C	啮合高度 D	弯曲强度	齿面强度	弯曲强度	齿面强度		
SR0.5-100	m0.5	62	R1	101	5	12	11.5	240	39.6	24.4	4.04	0.00~0.13	0.046
SR0.8-100	m0.8	38		101	8	12.3	11.5	613	108	62.5	11.0	0.00~0.14	0.073
SR1-100	m1	29		98	10	12	11	958	177	97.7	18.0	0.04~0.21	0.085
SR1-300		94											
SR1-500		159		0.26									
SR1.5-100	m1.5	20		101	15	20	18.5	2160	421	220	42.9	0.09~0.25	0.22
SR1.5-300		62		0.66									
SR1.5-500		105		1.10									
SR2-100	m2	14		98	20	25	23	3830	775	391	79.0	0.11~0.28	0.35
SR2-300		46		1.09									
SR2-500		79		1.82									
SR2.5-100	m2.5	11		100	25	30	27.5	5990	1240	611	127	0.13~0.31	0.54
SR2.5-300		37		1.64									
SR2.5-500		63		2.73									
SR3-100	m3	9		101	30	35	32	8620	1820	879	186	0.14~0.35	0.76
SR3-300		30		2.28									
SR3-500		52	3.81										
SR4-100	m4	6	98	40	45	41	15300	3330	1560	339	0.18~0.42	1.26	
SR4-500		39	6.50										
SR5-110	m5	5	108	50	50	45	24000	5300	2440	540	0.20~0.47	1.91	
SR5-500		31	8.92										
SR6-110	m6	4	111	60	60	54	34500	7740	3520	789	0.22~0.54	2.82	
SR6-500		25	12.8										
SR8-130	m8	3	123	75	75	67	44200	10400	4510	1060	0.28~0.63	4.85	
SR10-160	m10	3	155	90	80	70	66300	16100	6770	1640	0.33~0.70	7.67	

推荐配对小齿轮



SS 直齿轮

详细说明第 104 页

