




共 通 规 格	
精度等级	KHK R 001 4 级
齿 形	全齿高齿
压 力 角	20°
材 料	S45C
热 处 理	—
齿面硬度	(HB210 以下)
表面处理	黑色表面氧化

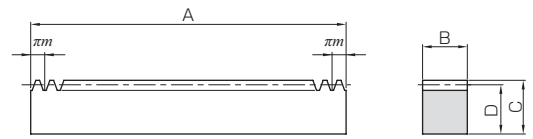

RF

产品型号	模数	齿数	形状	全长				容许传动力 (N)		容许传动力 (kgf)		侧隙 (mm)	质量 (kg)
				A	B	C	D	弯曲强度	齿面强度	弯曲强度	齿面强度		
SRF0.5-300	m0.5	191	RF	300.02	5	12	11.5	240	39.6	24.4	4.04	0.00~0.13	0.14
SRF0.8-300	m0.8	119		299.08	8	12.3	11.5	613	108	62.5	11.0	0.00~0.14	0.22
SRF1-300	m1	96		301.59	10	12	11	958	177	97.7	18.0	0.04~0.21	0.26
SRF1-500		159		499.51									
SRF1-1000		318		999.03									
SRF1.5-300	m1.5	64		301.59	15	20	18.5	2160	421	220	42.9	0.09~0.25	0.66
SRF1.5-500		106		499.51									
SRF1.5-1000		212		999.03									
SRF1.5-1500		320		1507.96									
SRF1.5-2000		435		2049.88									
SRF2-300	m2	48		301.59	20	25	23	3830	775	391	79.0	0.11~0.28	1.09
SRF2-500		80		502.65									
SRF2-1000		160		1005.31									
SRF2-1500		240		1507.96									
SRF2-2000		326		2048.31									
SRF2.5-300	m2.5	38		298.45	25	30	27.5	5990	1240	611	127	0.13~0.31	1.61
SRF2.5-500		64		502.65									
SRF2.5-1000		128		1005.31									
SRF2.5-1500		192		1507.96									
SRF2.5-2000		261		2049.88									
SRF3-300	m3	32	301.59	30	35	32	8620	1820	879	186	0.14~0.35	2.27	
SRF3-500		53	499.51										
SRF3-1000		106	999.03										
SRF3-1500		160	1507.96										
SRF3-2000		217	2045.17										
SRF4-500	m4	40	502.65	40	45	41	15300	3330	1560	339	0.18~0.42	6.47	
SRF4-1000		80	1005.31										
SRF4-1500		120	1507.96										
SRF4-2000		163	2048.31										
SRF5-500	m5	32	502.65	50	50	45	24000	5300	2440	540	0.20~0.47	8.88	
SRF5-1000		64	1005.31										
SRF5-1500		96	1507.96										
SRF5-2000		130	2042.04										
SRF6-500	m6	26	490.09	60	60	54	34500	7740	3520	789	0.22~0.54	12.5	
SRF6-1000		53	999.03										
SRF6-1500		80	1507.96										
SRF6-2000		108	2035.75										
SRF8-500	m8	20	502.66	75	75	67	44200	10400	4510	1060	0.28~0.63	19.8	
SRF8-1000		40	1005.31										
SRF10-1000	m10	32	1005.31	90	80	70	66300	16100	6770	1640	0.33~0.70	49.7	

直齿轮

斜齿轮

内齿轮

齿条

& C
小 P 齿
小齿轮等径锥
齿轮锥齿
轮交错轴
斜齿
轮蜗轮
蜗杆

齿轮箱

其他产品

