





共 通 规 格	
精度等级	JIS N8 级 (JIS B 1702-1 : 1998) *
齿 形	全齿高齿
压 力 角	20°
材 料	S45C
热 处 理	—
齿 面 硬 度	(194HB 以下)
表 面 处 理	黑色表面氧化

* 模数 0.8 以下的产品精度是与表记精度相当的产品。



S3T



S1T


产品型号	模数	齿数	形状	孔径	轮毂径	分度圆直径	齿顶圆直径	齿宽	轮毂长	全长	键槽
				A _{H7} (HB)	B	C	D	E	F	G	宽度×深度
SS0.5-15A	m0.5	15	S3T	3 _{H8}	8.5	7.5	8.5	5	11	16	—
SS0.5-18A		18		4 _{H8}	10	9	10				
SS0.5-20A		20		3 _{H8}	11	10	11				
SS0.5-20B				4 _{H8}	12	11	12				
SS0.5-22A		22		4 _{H8}	12	11	12				
SS0.5-24A		24	4 _{H8}	13	12	13					
SS0.5-24B			5 _{H8}	13.5	12.5	13.5					
SS0.5-25B		25	5 _{H8}	13.5	12.5	13.5					
SS0.5-28A		S1T	28	4 _{H8}	12	14	15		7	12	
SS0.5-30B			30	5	13	15	16				
SS0.5-50B			50	6	22	25	26				
SS0.5-54A			54	5	25	27	28				
SS0.5-60A			60	6	28	30	31				
SS0.5-80A			80	6	28	40	41				
SS0.5-80B				8	28	48	49				
SS0.5-96A			96	8	28	60	61				
SS0.5-120A			120	8	28	60	61				
SS0.8-15A	m0.8	15	S3T	5 _{H8}	13.6	12	13.6	8	14	22	—
SS0.8-20A		20	S1T	5 _{H8}	13	16	17.6		8	16	
SS0.8-20B				6	16	20	21.6				
SS0.8-25A		25		5 _{H8}	16	20	21.6				
SS0.8-28A		28		6	18	22.4	24				
SS0.8-30A		30		5 _{H8}	20	24	25.6				
SS0.8-30C				8	20	24	25.6				
SS0.8-40A		40		6	28	32	33.6				
SS0.8-45A	45	6		28	36	37.6					

螺孔		容许转矩 (N · m)		容许转矩 (kgf · m)		侧隙 (mm)	质量 (kg)	产品型号	
尺寸	J	弯曲强度	齿面强度	弯曲强度	齿面强度				
M3	2.5	0.46	0.022	0.047	0.0022	0~0.10	0.0056	SS0.5-15A	
M3		0.61	0.032	0.063	0.0033		0.0076	SS0.5-18A	
M3		0.72	0.040	0.073	0.0041		0.010	SS0.5-20A	
M3							0.0095	SS0.5-20B	
M3	0.83	0.049	0.084	0.0050	0.012		SS0.5-22A		
M3	2.5 3	0.93	0.059	0.095	0.0060		0.014	SS0.5-24A	
M4							0.013	SS0.5-24B	
M4	3	0.99	0.064	0.10	0.0065		0.014	SS0.5-25B	
M3	3.5	1.16	0.081	0.12	0.0082		0.011	SS0.5-28A	
M4		1.27	0.093	0.13	0.0095		0.012	SS0.5-30B	
M4		2.43	0.27	0.25	0.027		0.037	SS0.5-50B	
M4		2.67	0.32	0.27	0.032		0.047	SS0.5-54A	
M4		3.03	0.39	0.31	0.040		0.058	SS0.5-60A	
M4		4.24	0.72	0.43	0.074		0.079	SS0.5-80A	
M5							0.077	SS0.5-80B	
M5		5.21	1.06	0.53	0.11		0.099	SS0.5-96A	
M5		6.68	1.70	0.68	0.17		0.14	SS0.5-120A	
M4	3.5	1.89	0.088	0.19	0.0090	0~0.10	0.019	SS0.8-15A	
M4	4	2.94	0.17	0.30	0.017		0.018	SS0.8-20A	
M4							0.017	SS0.8-20B	
M4		4.05	0.27	0.41	0.027		0.029	SS0.8-25A	
M4		4.73	0.34	0.48	0.035		0.037	SS0.8-28A	
M4		5.19	0.39	0.53	0.040		0.045	SS0.8-30A	
M5							0.041	SS0.8-30C	
M4		7.55	0.72	0.77	0.074		0.085	SS0.8-40A	
M4	8.75	0.93	0.89	0.095	0.098	SS0.8-45A			







共 通 规 格	
精度等级	JIS B8级 (JIS B 1702-1 : 1998)
齿 形	全齿高齿
压 力 角	20°
材 料	S45C
热 处 理	—
齿面硬度	(194HB 以下)
表面 处理	黑色表面氧化




S3




S1



S3T



S1T



S1K

Ⓜ 淬火 + 产品型号为**标准品型号 + H**。

例：SS1-15H

产品型号		模数	齿数	形状	孔径	轮毂径	分度圆直径	齿顶圆直径	齿宽	轮毂长	全长	键槽	螺孔					
					A _{H7}	B	C	D				E	F	G	宽度×深度	尺寸	J	
SS1-15	H	m1	15	S3	8	17	15	17	10	20	30	—	—	—				
SS1-15A				S3T	5								M4	4				
SS1-15B				S3T	6								M4	4				
SS1-16	16		S3	8	18	16	18	—					—					
SS1-16B			S3T	6				M4					4					
SS1-17			S3	8				19					17	19	—	—		
SS1-18	18		S3	8	20	18	20	—					—					
SS1-19	19		S3	8	21	19	21	—					—					
SS1-20	H		20	S1	8	16	20	22					10	10	20	—	—	—
SS1-20A				S1T	5												M4	5
SS1-20B				S1T	6												M4	5
SS1-20C	S1T		8	M5	5													
SS1-21	21		S1	8	17	21	23	—									—	
SS1-22	22		S1	8	18	22	24	—									—	
SS1-23	23		S1	8	18	23	25	—									—	
SS1-24	H		24	S1	8	20	24	26		—	—							
SS1-24A				S1T	6					4 x 1.8	M4	5						
SS1-24C				S1K	10					M4	5							
SS1-25	H		25	S1	8	20	25	27		—	—							
SS1-25B				S1T	8					4 x 1.8	M5	5						
SS1-25C				S1K	10					M4	5							
SS1-26	H		26	S1	8	22	26	28		—	—							
SS1-27	H		27	S1	8	22	27	29		—	—							
SS1-28	H		28	S1	8	22	28	30		—	—							
SS1-29	H		29	S1	8	24	29	31		—	—							
SS1-30	H		30	S1	10	25	30	32		—	—							
SS1-30A				S1T	6					M4	5							
SS1-30B				S1T	8					M5	5							
SS1-32	H		32	S1	10	26	32	34		—	—							
SS1-32A				S1T	8					M5	5							
SS1-34				34	S1					10	26	34	36			—	—	
SS1-35	H		35	S1	10	26	35	37		—	—							
SS1-36	H		36	S1	10	28	36	38		—	—							
SS1-38	H		38	S1	10	32	38	40		—	—							
SS1-40	H		40	S1	10	35	40	42		—	—							
SS1-40B				S1K	10					4 x 1.8	M4	5						
SS1-42				42	S1					10	35	42	44	—	—			
SS1-44	H		44	S1	10	35	44	46		—	—							
SS1-45	H		45	S1	10	35	45	47		—	—							
SS1-45A				S1T	8					4 x 1.8	M5	5						
SS1-45B				S1K	10					M4	5							
SS1-46	H		46	S1	10	35	46	48		—	—							
SS1-48	H		48	S1	10	35	48	50		—	—							

容许转矩						侧隙 (mm)	质量 (kg)	产品型号
弯曲强度		齿面强度		齿面强度 				
N · m	kgf · m	N · m	kgf · m	N · m	kgf · m			
3.69	0.38	0.17	0.018	0.85	0.086	0.08~0.18	0.038 0.044 0.042	SS1-15 SS1-15A SS1-15B
4.09	0.42	0.2	0.021	0.98	0.10		0.044 0.049	SS1-16 SS1-16B
4.5	0.46	0.23	0.023	1.12	0.11		0.050	SS1-17
4.91	0.5	0.26	0.027	1.26	0.13		0.057	SS1-18
5.33	0.54	0.29	0.030	1.42	0.14		0.065	SS1-19
5.75	0.59	0.33	0.033	1.59	0.16		0.033 0.037 0.036 0.032	SS1-20 SS1-20A SS1-20B SS1-20C
6.17	0.63	0.36	0.037	1.77	0.18		0.037	SS1-21
6.6	0.67	0.4	0.041	1.95	0.20		0.042	SS1-22
7.03	0.72	0.45	0.045	2.15	0.22		0.045	SS1-23
7.47	0.76	0.49	0.050	2.36	0.24		0.052 0.055 0.046	SS1-24 SS1-24A SS1-24C
7.91	0.81	0.54	0.055	2.57	0.26		0.055 0.054 0.049	SS1-25 SS1-25B SS1-25C
8.35	0.85	0.58	0.059	2.79	0.28		0.064	SS1-26
8.79	0.9	0.63	0.064	3.01	0.31		0.067	SS1-27
9.24	0.94	0.68	0.070	3.25	0.33		0.070	SS1-28
9.69	0.99	0.73	0.075	3.49	0.36		0.079	SS1-29
10.1	1.03	0.79	0.081	3.74	0.38		0.082 0.089 0.085	SS1-30 SS1-30A SS1-30B
11.1	1.13	0.90	0.092	4.27	0.44		0.092 0.096	SS1-32 SS1-32A
12.0	1.22	1.03	0.10	4.83	0.49		0.10	SS1-34
12.4	1.27	1.09	0.11	5.13	0.52		0.10	SS1-35
12.9	1.31	1.16	0.12	5.44	0.55		0.12	SS1-36
13.8	1.41	1.30	0.13	6.08	0.62		0.14	SS1-38
14.7	1.50	1.45	0.15	6.76	0.69		0.16 0.16	SS1-40 SS1-40B
15.7	1.60	1.61	0.16	7.47	0.76		0.17	SS1-42
16.6	1.69	1.77	0.18	8.23	0.84		0.18	SS1-44
17.1	1.74	1.86	0.19	8.62	0.88		0.19 0.19 0.19	SS1-45 SS1-45A SS1-45B
17.6	1.79	1.95	0.20	9.02	0.92		0.19	SS1-46
18.5	1.89	2.13	0.22	9.84	1.00		0.21	SS1-48



直齿轮

斜齿轮

内齿轮

齿条

& C
小 P 齿条

等径锥齿轮

锥齿轮

交错轴斜齿轮


蜗轮蜗杆

齿轮箱


其他产品




共 通 规 格	
精度等级	JIS N8 级 (JIS B 1702-1 : 1998)
齿 形	全齿高齿
压 力 角	20°
材 料	S45C
热 处 理	—
齿面硬度	(194HB 以下)
表面 处理	黑色表面氧化



S1



S1T



S1K

Ⓜ 淬火 + 产品型号为**标准品型号 + H**。

例：SS1-50H

产品型号		模数	齿数	形状	孔径	轮毂径	分度圆直径	齿顶圆直径	齿宽	轮毂长	全长	键槽	螺孔		
					A _{H7}		B	C				D	E	F	G
SS1-50		m1	50	S1	10	35	50	52	10	10	20	—	—	—	
SS1-50A			S1T	8								M5	5		
SS1-52			52	S1	10		52	54				—	—	—	
SS1-54			54	S1	10		54	56				—	—	—	
SS1-55			55	S1	10		55	57				—	—	—	
SS1-56			56	S1	10		56	58				—	—	—	
SS1-58			58	S1	10		58	60				—	—	—	
SS1-60			60	S1	10		60	62				—	—	—	
SS1-60C				S1K	15							5 x 2.3	M4	5	
SS1-62			62	S1	10	40	62	64				—	—	—	
SS1-64			64	S1	10		64	66				—	—	—	
SS1-65			65	S1	10		65	67				—	—	—	
SS1-66			66	S1	10	40	66	68				—	—	—	
SS1-68			68	S1	10		68	70				—	—	—	
SS1-70			70	S1	10		70	72				—	—	—	
SS1-72			72	S1	10		72	74				—	—	—	
SS1-75			75	S1	10		75	77				—	—	—	
SS1-76			76	S1	10		76	78				—	—	—	
SS1-80			80	S1	10		80	82				—	—	—	
SS1-84			84	S1	10		84	86				—	—	—	
SS1-85			85	S1	10		85	87				—	—	—	
SS1-88			88	S1	10		88	90				—	—	—	
SS1-90			90	S1	10		90	92				—	—	—	
SS1-95			95	S1	10		95	97				—	—	—	
SS1-96			96	S1	10		96	98				—	—	—	
SS1-100			100	S1	10			100				102	—	—	—
SS1-110			110	S1	15		50	110				112	—	—	—
SS1-120			120	S1	15	50	120	122				—	—	—	
SS1-150			150	S1	20	120	150	152				—	—	—	
SS1-200			200	S1	20	160	200	202							—

容许转矩						侧隙 (mm)	质量 (kg)	产品型号
弯曲强度		齿面强度		齿面强度 				
N·m	kgf·m	N·m	kgf·m	N·m	kgf·m			
19.5	1.98	2.32	0.24	10.7	1.09	0.08~0.18	0.22	SS1-50
20.4	2.08	2.52	0.26	11.6	1.18		0.22	SS1-50A
21.4	2.18	2.73	0.28	12.5	1.28		0.23	SS1-52
21.8	2.23	2.83	0.29	13.0	1.33		0.24	SS1-54
22.3	2.28	2.94	0.30	13.5	1.38		0.25	SS1-55
22.3	2.28	2.94	0.30	13.5	1.38		0.26	SS1-56
23.3	2.37	3.17	0.32	14.5	1.48		0.27	SS1-58
24.2	2.47	3.40	0.35	15.6	1.59		0.29	SS1-60
25.2	2.57	3.64	0.37	16.7	1.70		0.27	SS1-60C
26.2	2.67	3.89	0.40	17.8	1.81		0.32	SS1-62
26.6	2.72	4.02	0.41	18.4	1.87		0.34	SS1-64
27.1	2.77	4.15	0.42	18.9	1.93		0.35	SS1-65
28.1	2.86	4.42	0.45	20.1	2.05		0.35	SS1-66
28.1	2.86	4.42	0.45	20.1	2.05		0.37	SS1-68
29.1	2.96	4.70	0.48	21.4	2.18		0.37	SS1-68
30.0	3.06	4.98	0.51	22.6	2.31		0.39	SS1-70
31.5	3.21	5.43	0.55	24.6	2.51		0.41	SS1-72
32.0	3.26	5.59	0.57	25.3	2.58		0.43	SS1-75
32.0	3.26	5.59	0.57	25.3	2.58		0.44	SS1-76
33.9	3.46	6.23	0.63	28.1	2.87		0.48	SS1-80
35.8	3.66	6.90	0.7	31.1	3.17		0.52	SS1-84
36.3	3.71	7.08	0.72	31.8	3.25		0.53	SS1-85
37.8	3.85	7.62	0.78	34.2	3.48		0.56	SS1-88
38.8	3.95	7.98	0.81	35.8	3.65		0.59	SS1-90
41.2	4.20	8.95	0.91	40.0	4.08		0.64	SS1-95
41.7	4.25	9.15	0.93	40.8	4.16		0.65	SS1-96
43.7	4.45	9.97	1.02	44.4	4.53		0.70	SS1-100
48.6	4.95	12.2	1.24	53.9	5.50		0.87	SS1-110
53.5	5.45	14.7	1.50	64.4	6.57		1.01	SS1-120
68.2	6.96	23.6	2.41	102	10.4		2.23	SS1-150
71.5	7.29	33.6	3.42	144	14.7	4.00	SS1-200	

直齿轮

斜齿轮

内齿轮

齿条

& C
小 P 齿条

等径锥齿轮

锥齿轮

交错轴斜齿轮

蜗轮蜗杆

齿轮箱

其他产品



直齿轮

斜齿轮

内齿轮

齿条

& C P
小齿轮 齿条

等径锥齿轮

锥齿轮

交错轴斜齿轮


蜗轮蜗杆

齿轮箱


其他产品




共 通 规 格	
精度等级	JIS N8 级 (JIS B 1702-1 : 1998)
齿 形	全齿高齿
压 力 角	20°
材 料	S45C
热 处 理	—
齿面硬度	(194HB 以下)
表面 处理	黑色表面氧化




S3



S1



S1T



S1K

Ⓜ 淬火 + 产品型号为**标准品型号 + H**。

例：SS1.5-12H

产品型号		模数	齿数	形状	孔径	轮毂径	分度圆直径	齿顶圆直径	齿宽	轮毂长	全长	键槽	螺孔
					AH7	B	C	D				宽度×深度	尺寸 J
SS1.5-12	Ⓜ	m1.5	12	S3	8	21	18	21	15	15	30	—	—
SS1.5-13	Ⓜ		13	S3	8	22.5	19.5	22.5				—	—
SS1.5-14	Ⓜ		14	S1	8	16	21	24				—	—
SS1.5-14B	Ⓜ			S1T	8	16	21	24				M5	5
SS1.5-15	Ⓜ		15	S1	8	18	22.5	25.5				—	—
SS1.5-16	Ⓜ		16	S1	8	20	24	27				—	—
SS1.5-16B	Ⓜ			S1T	8	20	24	27				M5	5
SS1.5-17	Ⓜ		17	S1	8	21	25.5	28.5				—	—
SS1.5-18	Ⓜ		18	S1	8	22	27	30				—	—
SS1.5-19	Ⓜ		19	S1	8	23	28.5	31.5				—	—
SS1.5-20	Ⓜ		20	S1	8	24	30	33				—	—
SS1.5-21	Ⓜ		21	S1	8	25	31.5	34.5				—	—
SS1.5-22	Ⓜ		22	S1	8	26	33	36				—	—
SS1.5-23	Ⓜ		23	S1	8	27	34.5	37.5				—	—
SS1.5-24	Ⓜ		24	S1	8	28	36	39				—	—
SS1.5-25	Ⓜ		25	S1	8	30	37.5	40.5				—	—
SS1.5-26	Ⓜ		26	S1	10	32	39	42		10	25	—	—
SS1.5-26A	Ⓜ			S1K	12	32	39	42				4 x 1.8	M4 5
SS1.5-27	Ⓜ		27	S1	10	34	40.5	43.5				—	—
SS1.5-28	Ⓜ		28	S1	10	36	42	45				—	—
SS1.5-28A	Ⓜ			S1K	12	36	42	45				4 x 1.8	M4 5
SS1.5-29	Ⓜ		29	S1	10	37	43.5	46.5				—	—
SS1.5-30	Ⓜ		30	S1	10	38	45	48				—	—
SS1.5-30C	Ⓜ			S1K	15	38	45	48				5 x 2.3	M4 5
SS1.5-32	Ⓜ		32	S1	10	40	48	51				—	—
SS1.5-32B	Ⓜ			S1K	12	40	48	51				4 x 1.8	M4 5
SS1.5-34	Ⓜ		34	S1	10	40	51	54				—	—
SS1.5-35	Ⓜ		35	S1	10	42	52.5	55.5				—	—
SS1.5-36	Ⓜ		36	S1	10	45	54	57				—	—
SS1.5-38	Ⓜ		38	S1	12	45	57	60				—	—
SS1.5-40	Ⓜ		40	S1	12	45	60	63				—	—

容许转矩						侧隙 (mm)	质量 (kg)	产品型号
弯曲强度		齿面强度		齿面强度 				
N · m	kgf · m	N · m	kgf · m	N · m	kgf · m			
6.86	0.70	0.36	0.037	1.76	0.18	0.10~0.22	0.059	SS1.5-12
8.84	0.90	0.44	0.045	2.12	0.22		0.070	SS1.5-13
11.1	1.13	0.52	0.053	2.50	0.26		0.047 0.046	SS1.5-14 SS1.5-14B
12.5	1.27	0.60	0.062	2.91	0.30		0.057	SS1.5-15
13.8	1.41	0.70	0.071	3.36	0.34		0.068 0.067	SS1.5-16 SS1.5-16B
15.2	1.55	0.80	0.082	3.84	0.39		0.077	SS1.5-17
16.6	1.69	0.91	0.093	4.35	0.44		0.087	SS1.5-18
18.0	1.83	1.03	0.11	4.89	0.50		0.098	SS1.5-19
19.4	1.98	1.15	0.12	5.47	0.56		0.11	SS1.5-20
20.8	2.12	1.29	0.13	6.08	0.62		0.12	SS1.5-21
22.3	2.27	1.43	0.15	6.72	0.69		0.13	SS1.5-22
23.7	2.42	1.58	0.16	7.40	0.75		0.15	SS1.5-23
25.2	2.57	1.73	0.18	8.12	0.83		0.16	SS1.5-24
26.7	2.72	1.90	0.19	8.87	0.90		0.18	SS1.5-25
28.2	2.87	2.06	0.21	9.62	0.98		0.19 0.18	SS1.5-26 SS1.5-26A
29.7	3.03	2.23	0.23	10.4	1.06		0.21	SS1.5-27
31.2	3.18	2.41	0.25	11.2	1.14		0.23 0.22	SS1.5-28 SS1.5-28A
32.7	3.34	2.60	0.26	12.1	1.23		0.24	SS1.5-29
34.2	3.49	2.79	0.28	12.9	1.32		0.26 0.24	SS1.5-30 SS1.5-30C
37.3	3.80	3.19	0.33	14.8	1.51		0.30 0.28	SS1.5-32 SS1.5-32B
40.4	4.12	3.63	0.37	16.7	1.71		0.32	SS1.5-34
41.9	4.28	3.85	0.39	17.8	1.81		0.35	SS1.5-35
43.5	4.43	4.09	0.42	18.8	1.92		0.38	SS1.5-36
46.6	4.75	4.58	0.47	21.0	2.14		0.40	SS1.5-38
49.8	5.07	5.10	0.52	23.4	2.38		0.44	SS1.5-40

直齿轮

斜齿轮

内齿轮

齿条

& C P
小齿轮 齿条

等径锥齿轮

锥齿轮

交错轴斜齿轮

蜗轮蜗杆

齿轮箱



其他产品





共 通 规 格	
精度等级	JIS N8 级 (JIS B 1702-1:1998) *
齿 形	全齿高齿
压 力 角	20°
材 料	S45C
热 处 理	—
齿面硬度	(194HB 以下)
表面处理	黑色表面氧化
侧 隙	0.10 ~ 0.22

* J 系列产品的精度相当于表记精度。

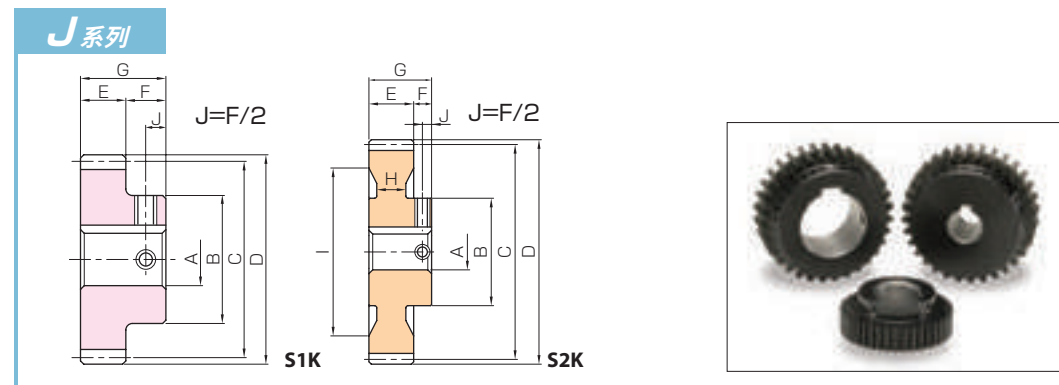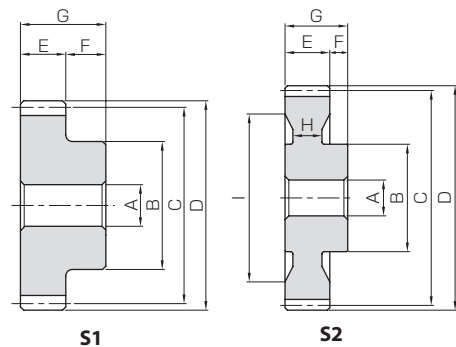

H 淬火 + 产品型号为**标准品型号 + H**。

例：SS1.5-42H

产品型号		齿数	形状	孔径	轮毂径	分度圆		齿顶圆		齿宽	轮毂长	全长	腹板厚	轮缘径	容许转矩						质量 (kg)
						直径	直径	弯曲强度							齿面强度		齿面强度 				
								N·m	kgf·m						N·m	kgf·m	N·m	kgf·m			
SS1.5-42		42	S1	12	45	63	66	15	10	25	—	—	52.9	5.40	5.65	0.58	25.8	2.63	0.47		
SS1.5-44		44				66	69						56.1	5.72	6.23	0.64	28.4	2.90	0.51		
SS1.5-45		45				67.5	70.5						57.7	5.88	6.53	0.67	29.8	3.03	0.53		
SS1.5-46		46				69	72						59.3	6.04	6.83	0.70	31.1	3.17	0.54		
SS1.5-48		48				72	75						62.4	6.37	7.47	0.76	34.0	3.46	0.58		
SS1.5-50		50		50	50	75	78						65.7	6.69	8.15	0.83	36.9	3.77	0.62		
SS1.5-52		52				78	81						68.9	7.02	8.85	0.90	40.0	4.08	0.68		
SS1.5-54		54				81	84						72.1	7.35	9.59	0.98	43.3	4.41	0.73		
SS1.5-55		55				82.5	85.5						73.7	7.51	9.96	1.02	44.9	4.58	0.75		
SS1.5-56		56				84	87						75.3	7.68	10.4	1.06	46.6	4.75	0.77		
SS1.5-58		58				—	—						87	90	78.5	8.01	11.2	1.14	50.1	5.11	0.82
SS1.5-60		60											90	93	81.8	8.34	12.0	1.22	53.7	5.47	0.87
SS1.5-62		62											93	96	85.0	8.67	12.8	1.31	57.4	5.85	0.95
SS1.5-64		64		96	99								88.3	9.00	13.7	1.40	61.3	6.25	1.00		
SS1.5-65		65		97.5	100.5	89.9	9.17						14.2	1.45	63.2	6.45	1.03				
SS1.5-66		66		15	55	99	102						91.5	9.33	14.6	1.49	65.2	6.65	1.06		
SS1.5-68		68				102	105						94.8	9.66	15.6	1.59	69.3	7.07	1.11		
SS1.5-70		70				105	108						98.0	10.0	16.6	1.69	73.6	7.50	1.17		
SS1.5-72		72			108	111	101						10.3	17.6	1.79	77.9	7.95	1.23			
SS1.5-75		75			112.5	115.5	106						10.8	19.2	1.95	84.7	8.64	1.36			
SS1.5-76		76	60		—	114	117	108	11.0	19.7	2.01	87.0	8.88	1.39							
SS1.5-80		80				120	123	114	11.7	22.0	2.24	96.7	9.86	1.52							
SS1.5-84		84				126	129	121	12.3	24.4	2.49	107	10.9	1.66							
SS1.5-85		85		127.5		130.5	123	12.5	25.1	2.56	109	11.2	1.69								
SS1.5-88		88		132		135	128	13.0	27.0	2.75	117	12.0	1.80								
SS1.5-90		90	S2	70	135	138	131	13.3	28.3	2.89	123	12.5	1.87								
SS1.5-95		95			142.5	145.5	139	14.2	31.8	3.24	137	14.0	2.07								
SS1.5-100		100			150	153	147	15.0	35.5	3.62	152	15.5	1.88								
SS1.5-120		120			180	183	180	18.4	52.3	5.33	221	22.5	2.74								
SS1.5-150		150		S1	20	180	225	228	192	19.6	70.3	7.17	276	28.1	6.62						
SS1.5-200		200				25	240	300	303	261	26.7	131	13.3	504	51.4	11.8					

J系列产品型号为**标准品型号 + J + 孔径**

例：SS1.5-42J12



[illegible]

「※」表示原孔径产品，非淬火+对象产品。淬火+详细内容请参考第 22 页。







共 通 规 格	
精度等级	JIS N8 级 (JIS B 1702-1 : 1998) *
齿 形	全齿高齿
压 力 角	20°
材 料	S45C
热 处 理	—
齿面硬度	(194HB 以下)
表面处理	黑色表面氧化
侧 隙	0.14 ~ 0.28

* J系列产品的精度相当于表记精度。

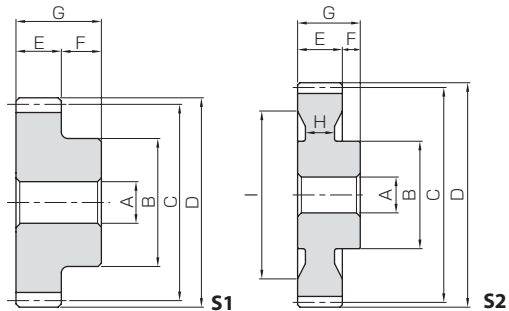

* FD 是锻造加工面。



* FD 是锻造加工面。

H 淬火 + 产品型号为**标准品型号 + H**。

例：SS2.5-12H

产品型号		齿数	形状	孔径	轮毂径	分度圆		齿顶圆 直径	齿宽	轮毂长	全长	腹板厚	轮缘径	容许转矩						质量 (kg)
						弯曲强度	齿面强度							齿面强度 						
							N·m							kgf·m	N·m	kgf·m	N·m	kgf·m		
A _{H7}	B	C	D	E	F	G	(H)	(I)	N·m	kgf·m	N·m	kgf·m	N·m	kgf·m						
SS2.5-12		12	S1	12	23	30	35	25	12	37	—	—	31.8	3.24	1.77	0.18	8.37	0.85	0.15	
SS2.5-13		13			25	32.5	37.5						40.9	4.17	2.14	0.22	10.1	1.03	0.18	
SS2.5-14		14			25	35	40						51.5	5.25	2.53	0.26	11.9	1.21	0.20	
SS2.5-15		15			30	37.5	42.5						57.7	5.89	2.96	0.30	13.9	1.41	0.23	
SS2.5-16		16		32	40	45	64.0						6.52	3.43	0.35	16.0	1.63	0.27		
SS2.5-17		17		35	42.5	47.5	70.3						7.17	3.93	0.40	18.3	1.86	0.32		
SS2.5-18		18		38	45	50	76.7						7.82	4.47	0.46	20.7	2.11	0.37		
SS2.5-19		19		39	47.5	52.5	83.2						8.49	5.05	0.51	23.3	2.38	0.41		
SS2.5-20		20		40	50	55	89.8						9.16	5.66	0.58	26.1	2.66	0.45		
SS2.5-21		21		42	52.5	57.5	96.4						9.83	6.30	0.64	29.0	2.96	0.50		
SS2.5-22		22		15	44	55	60						103	10.5	6.99	0.71	32.1	3.28	0.56	
SS2.5-23		23				46	57.5						62.5	110	11.2	7.71	0.79	35.4	3.61	0.61
SS2.5-24		24	48			60	65	117	11.9	8.47	0.86	38.8	3.95	0.67						
SS2.5-25		25	50			62.5	67.5	124	12.6	9.26	0.94	42.3	4.32	0.74						
SS2.5-26		26	55		65	70	130	13.3	10.1	1.03	45.9	4.68	0.82							
SS2.5-27		27	60		67.5	72.5	137	14.0	10.9	1.11	49.6	5.06	0.92							
SS2.5-28		28	60		70	75	144	14.7	11.7	1.20	53.4	5.45	0.97							
SS2.5-29		29	62		72.5	77.5	151	15.4	12.6	1.29	57.4	5.86	1.04							
SS2.5-30		30	65	75	80	159	16.2	13.6	1.39	61.6	6.28	1.13								
SS2.5-32		32	70	80	85	173	17.6	15.6	1.59	70.3	7.17	1.30								
SS2.5-34		34	20	70	85	90	187	19.1	17.7	1.80	79.6	8.11	1.42							
SS2.5-35		35			87.5	92.5	194	19.8	18.8	1.92	84.4	8.61	1.49							
SS2.5-36		36			90	95	201	20.5	20.0	2.04	89.5	9.12	1.56							
SS2.5-38		38			95	100	216	22.0	22.4	2.28	99.9	10.2	1.66							
SS2.5-40		40		100	105	230	23.5	24.9	2.54	111	11.3	1.81								
SS2.5-42		42		105	110	245	25.0	27.6	2.82	123	12.5	1.97								
SS2.5-44		44		110	115	260	26.5	30.5	3.11	135	13.8	2.14								
SS2.5-45		45		112.5	117.5	267	27.2	31.9	3.26	141	14.4	2.22								
SS2.5-46		46	115	120	274	28.0	33.5	3.41	148	15.1	2.31									
SS2.5-48		48	120	125	289	29.5	36.7	3.74	161	16.4	2.49									
SS2.5-50		50	S2	70	125	130	304	31.0	40.0	4.08	175	17.9	2.68							
SS2.5-52		52			130	135	319	32.5	43.5	4.44	190	19.3	2.88							
SS2.5-54		54			135	140	334	34.0	47.2	4.81	205	20.9	3.08							
SS2.5-55		55			137.5	142.5	341	34.8	49.1	5.01	213	21.7	3.19							
SS2.5-56		56		140	145	349	35.6	51.0	5.20	221	22.5	3.29								
SS2.5-58		58		70	145	150	364	37.1	55.0	5.61	237	24.2	3.51							
SS2.5-60		60		S1	80	150	155	(10)	(127)	379	38.6	59.1	6.03	254	25.9	3.69				
SS2.5-62		62				155	160	130	394	40.1	63.4	6.46	272	27.7	3.54					
SS2.5-64		64	160			165	131	409	41.7	67.8	6.92	290	29.6	3.76						
SS2.5-65		65	162.5			167.5	134	416	42.4	70.1	7.15	299	30.5	3.84						
SS2.5-66		66	S2	25	165	170	15	140	424	43.2	72.4	7.39	309	31.5	3.87					
SS2.5-68		68			170	175		140	439	44.7	77.2	7.87	328	33.4	4.13					
SS2.5-70		70			175	180		146	454	46.3	82.1	8.37	348	35.5	4.30					
SS2.5-72		72			180	185		151	469	47.8	87.1	8.89	368	37.6	4.49					
SS2.5-75		75			187.5	192.5		159	492	50.1	95.0	9.69	400	40.8	4.77					
SS2.5-76		76	S1	30	80	190	195	(10)	(177)	160	499	50.9	97.7	9.97	411	41.9	4.90			
SS2.5-80		80			200	205	(202)	441	45.0	90.9	9.27	359	36.7	6.50						
SS2.5-90		90			225	230	(227)	505	51.5	117	12.0	460	46.9	8.20						
SS2.5-100		100			250	255	(277)	569	58.0	147	15.0	573	58.5	10.03						
SS2.5-120		120			300	305	(277)	696	71.0	218	22.2	840	85.7	10.70						

J系列产品型号为**标准品型号 + J + 孔径**

例：SS2.5-12J12



孔径 H7	* 表中颜色与 J 系列形状图的截面颜色相对应。															
键槽 Jø9	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	
螺孔尺寸	4 × 1.8	5 × 2.3				6 × 2.8				8 × 3.3			10 × 3.3		12 × 3.3	
产品型号	M4					M5					M6			M8		
SS2.5-12 J 孔径	※ S1T2															
SS2.5-13J 孔径	※ S1K															
SS2.5-14J 孔径	※ S1K	S1K														
SS2.5-15 J 孔径			※ S1K	S1K												
SS2.5-16 J 孔径			※ S1K	S1K	S1K	S1K										
SS2.5-17 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K								
SS2.5-18 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SS2.5-19 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SS2.5-20 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SS2.5-21 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SS2.5-22 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SS2.5-23 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SS2.5-24 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SS2.5-25 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SS2.5-26 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS2.5-27 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SS2.5-28 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-29 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-30 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-32 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-34 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-35 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-36 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-38 J 孔径										※ S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-40 J 孔径										※ S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-42 J 孔径										※ S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-44 J 孔径										※ S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-45 J 孔径										※ S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-46 J 孔径										※ S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-48 J 孔径										※ S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-50 J 孔径										※ S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-52 J 孔径										※ S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-54 J 孔径										※ S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-55 J 孔径										※ S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-56 J 孔径										※ S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-58 J 孔径										※ S1K	S1K	S1K	S1K	S1K	S1K	
SS2.5-60 J 孔径	产品形状已经改变。有关新产品形状の詳細信息，请联系 KHK。									※ S2K	S2K	S2K	S2K	S2K	S2K	
SS2.5-62 J 孔径										※ S2K	S2K	S2K	S2K	S2K	S2K	
SS2.5-64 J 孔径										※ S2K	S2K	S2K	S2K	S2K	S2K	
SS2.5-65J 孔径										※ S2K	S2K	S2K	S2K	S2K	S2K	
SS2.5-66 J 孔径										※ S2K	S2K	S2K	S2K	S2K	S2K	
SS2.5-68 J 孔径										※ S2K	S2K	S2K	S2K	S2K	S2K	
SS2.5-70 J 孔径										※ S2K	S2K	S2K	S2K	S2K	S2K	
SS2.5-72 J 孔径										※ S2K	S2K	S2K	S2K	S2K	S2K	
SS2.5-75 J 孔径										※ S2K	S2K	S2K	S2K	S2K	S2K	
SS2.5-76 J 孔径										※ S2K	S2K	S2K	S2K	S2K	S2K	
SS2.5-80 J 孔径	产品形状已经改变。有关新产品形状の詳細信息，请联系 KHK。									※ S4K	S4K	S4K	S4K	S4K	S4K	
SS2.5-90 J 孔径	产品形状已经改变。有关新产品形状の詳細信息，请联系 KHK。									※ S4K	S4K	S4K	S4K	S4K	S4K	
SS2.5-100 J 孔径	产品形状已经改变。有关新产品形状の詳細信息，请联系 KHK。									※ S4K	S4K	S4K	S4K	S4K	S4K	
SS2.5-120 J 孔径	产品形状已经改变。有关新产品形状の詳細信息，请联系 KHK。									※ S4K	S4K	S4K	S4K	S4K	S4K	

「※」表示原孔径产品，非淬火+对象产品。淬火+详细内容请参考第 22 页。







共 通 規 格	
精度等级	JIS N8 级 (JIS B 1702-1:1998) *
齿 形	全齿高齿
压 力 角	20°
材 料	S45C
热 处 理	—
齿面硬度	(194HB 以下)
表面处理	黑色表面氧化
侧 隙	0.14 ~ 0.32

* J系列产品的精度相当于表记精度。

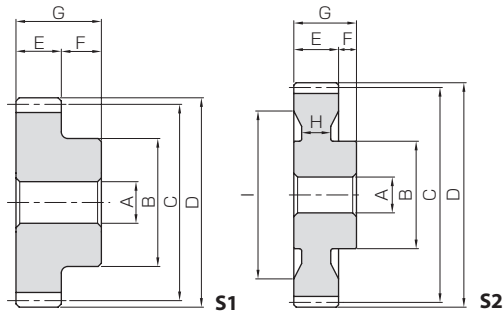

* FD 是锻造加工面。



* FD 是锻造加工面。

H 淬火 + 产品型号为**标准品型号 + H**。

例：SS3-12H

产品型号		齿数	形状	孔径	轮毂径	分度圆		齿顶圆 直径	齿宽	轮毂长	全长	腹板厚	轮缘径	容许转矩						质量 (kg)							
						A _{H7}	B							C	D	E	F	G	(H)		(I)	弯曲强度		齿面强度		齿面强度 	
																						N·m	kgf·m	N·m	kgf·m	N·m	kgf·m
SS3-12		12	S1	15	28	36	42	30	15	45				54.9	5.59	3.12	0.32	14.6	1.49	0.25							
SS3-13		13			30	39	45							70.7	7.21	3.77	0.38	17.6	1.80	0.30							
SS3-14		14			32	42	48							88.9	9.07	4.47	0.46	20.8	2.12	0.36							
SS3-15		15			36	45	51							99.7	10.2	5.23	0.53	24.2	2.47	0.43							
SS3-16		16			38	48	54							111	11.3	6.05	0.62	28.0	2.85	0.50							
SS3-17		17			39	51	57							122	12.4	6.93	0.71	31.9	3.26	0.55							
SS3-18		18			40	54	60							133	13.5	7.87	0.80	36.2	3.69	0.62							
SS3-19		19			45	57	63							144	14.7	8.88	0.91	40.8	4.16	0.73							
SS3-20		20			50	60	66							155	15.8	9.95	1.02	45.6	4.65	0.83							
SS3-21		21			52	63	69							167	17.0	11.1	1.13	50.7	5.17	0.92							
SS3-22		22			54	66	72							178	18.2	12.3	1.25	56.1	5.72	1.01							
SS3-23		23			56	69	75							190	19.4	13.6	1.38	61.7	6.29	1.11							
SS3-24		24			58	72	78							202	20.6	14.9	1.52	67.7	6.90	1.21							
SS3-25		25			60	75	81							214	21.8	16.3	1.66	73.9	7.53	1.26							
SS3-26		26			65	78	84							226	23.0	17.7	1.81	80.1	8.16	1.41							
SS3-27		27			65	81	87							237	24.2	19.2	1.96	86.5	8.82	1.49							
SS3-28		28			70	84	90							250	25.4	20.7	2.11	93.2	9.50	1.65							
SS3-29		29			70	87	93							262	26.7	22.3	2.27	100	10.2	1.74							
SS3-30		30			75	90	96							274	27.9	24.0	2.44	107	10.9	1.91							
SS3-32		32			75	96	102							298	30.4	27.4	2.80	123	12.5	2.11							
SS3-34		34			80		102							108	323	32.9	31.2	3.18	139	14.1	2.41						
SS3-35		35					105							111	335	34.2	33.1	3.38	147	15.0	2.52						
SS3-36		36					108							114	348	35.5	35.2	3.59	156	15.9	2.64						
SS3-38		38					114							120	373	38.0	39.4	4.02	174	17.8	2.82						
SS3-40		40		120			126							398	40.6	44.0	4.49	193	19.1	3.08							
SS3-42		42		80										126	132	423	43.2	48.9	4.98	214	21.8	3.35					
SS3-44		44												132	138	449	45.7	54.0	5.50	235	24.0	3.64					
SS3-45		45												135	141	461	47.0	56.6	5.78	246	25.1	3.79					
SS3-46		46			138	144								474	48.3	59.4	6.05	257	26.2	3.94							
SS3-48		48			144	150								500	50.9	65.0	6.63	281	28.6	4.25							
SS3-50		50			S2	25								80	150	156	(10)	(123)	525	53.6	70.9	7.23	305	31.1	4.58		
SS3-52		52		156			162								126	551	56.2	77.1	7.86	330	33.7	4.38					
SS3-54		54		162			168								132	577	58.8	83.6	8.52	357	36.4	4.61					
SS3-55		55		165			171								131	590	60.1	86.9	8.86	370	37.8	4.81					
SS3-56		56		168			174								134	602	61.4	90.3	9.21	384	39.2	4.94					
SS3-58		58		80											174	180	144	628	64.1	97.3	9.92	413	42.1	5.10			
SS3-60		60												180	186	(10)	(153)	654	66.7	105	10.7	442	45.1	6.41			
SS3-62		62												186	192	150	680	69.4	112	11.4	473	48.2	5.76				
SS3-64		64												192	198	158	588	60.0	99.9	10.2	396	40.4	5.99				
SS3-65		65												195	201	161	599	61.1	103	10.5	409	41.7	6.13				
SS3-66		66												S2		90	198	204	160	610	62.2	107	10.9	422	43.1	6.67	
SS3-68		68		204			210										170	632	64.4	114	11.6	450	45.8	6.86			
SS3-70		70		210	216	176	654										66.6	121	12.4	478	48.7	7.15					
SS3-72		72		216	222	182	675										68.9	129	13.1	507	51.7	7.46					
SS3-75		75		225	231	190	708										72.2	141	14.3	552	56.3	7.95					
SS3-76		76		90	228	234	190										719	73.3	145	14.8	567	57.9	8.20				
SS3-80		80		S2	30		90							240	246	(10)	(213)	763	77.8	162	16.5	632	64.4	8.85			
SS3-90		90					100							270	276	16	240	872	89.0	208	21.2	809	82.4	10.6			
SS3-100		100	100				300	306	(10)	(273)	983	100	261	26.6	1010	103	12.51										
SS3-120		120	130				360	366	(333)	1200	123	386	39.4	1480	151	18.1											

J系列产品型号为**标准品型号 + J + 孔径**

例：SS3-12J15



孔径 H7	* 表中颜色与 J 系列形状图的截面颜色相对应。														
键槽 Js9	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50
螺孔尺寸	5 × 2.3			6 × 2.8				8 × 3.3			10 × 3.3		12 × 3.3	14 × 3.8	
产品型号	M4			M5				M6			M8			M10	
SS3-12 J 孔径	※ S1T2														
SS3-13 J 孔径	※ S1T2														
SS3-14 J 孔径	※ S1K	S1K	S1K												
SS3-15 J 孔径	※ S1K	S1K	S1K	S1K	S1K										
SS3-16 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SS3-17 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SS3-18 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SS3-19 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SS3-20 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SS3-21 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SS3-22 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SS3-23 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SS3-24 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SS3-25 J 孔径						※ S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS3-26 J 孔径						※ S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS3-27 J 孔径						※ S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS3-28 J 孔径						※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SS3-29 J 孔径						※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SS3-30 J 孔径						※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS3-32 J 孔径						※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS3-34 J 孔径						※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS3-35 J 孔径						※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS3-36 J 孔径						※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS3-38 J 孔径								※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS3-40 J 孔径								※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS3-42 J 孔径								※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS3-44 J 孔径								※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS3-45 J 孔径								※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS3-46 J 孔径								※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS3-48 J 孔径								※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS3-50 J 孔径	产品形状已经改变。有关新产品形状的详细信息，请联系 KHK。							※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS3-52 J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS3-54 J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS3-55 J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS3-56 J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS3-58 J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS3-60 J 孔径	产品形状已经改变。有关新产品形状的详细信息，请联系 KHK。							※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS3-62 J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS3-64 J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS3-65J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS3-66 J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS3-68 J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS3-70 J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS3-72 J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS3-75 J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS3-76 J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS3-80 J 孔径	产品形状已经改变。有关新产品形状的详细信息，请联系 KHK。							※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS3-90 J 孔径								※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS3-100 J 孔径	产品形状已经改变。有关新产品形状的详细信息，请联系 KHK。							※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS3-120 J 孔径	产品形状已经改变。有关新产品形状的详细信息，请联系 KHK。							※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K

「※」表示原孔径产品，非淬火+对象产品。淬火+详细内容请参考第 22 页。




共 通 规 格	
精度等级	JIS N8 级 (JIS B 1702-1 : 1998) *
齿 形	全齿高齿
压 力 角	20°
材 料	S45C
热 处 理	—
齿面硬度	(194HB 以下)
表面处理	黑色表面氧化 (半订制产品除外)
侧 隙	0.18 ~ 0.38

* J系列产品的精度相当于表记精度。

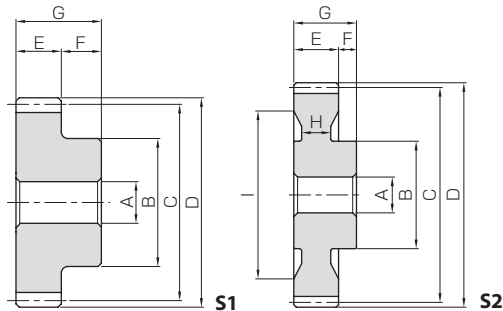

* FD 是锻造加工面。

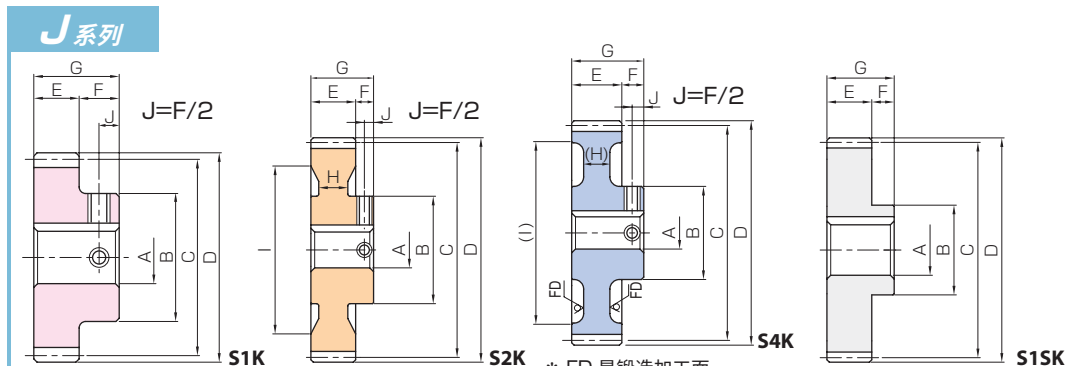

* FD 是锻造加工面。

J系列产品型号为**标准品型号 + J + 孔径**

例：SS4-14J20

淬火 + 产品型号为 标准品型号 + H。										例：SS4-12H										
产品型号		齿数	形状	孔径	轮毂径	分度圆直径		齿顶圆直径	齿宽	轮毂长	全长	腹板厚	轮缘径	容许转矩						质量 (kg)
				A _{H7}		B	C	D						E	F	G	(H)	(I)	弯曲强度	
				N·m	kgf·m	N·m	kgf·m	N·m	kgf·m											
SS4-12		12	S1	20	35	48	56	20	60	—	—	130	13.3	7.62	0.78	35.3	3.59	0.57		
SS4-13		13			38	52	60					168	17.1	9.22	0.94	42.5	4.33	0.70		
SS4-14		14			40	56	64					211	21.5	10.9	1.11	50.1	5.11	0.82		
SS4-15		15			45	60	68					236	24.1	12.8	1.30	58.4	5.96	0.99		
SS4-16		16			50	64	72					262	26.7	14.7	1.50	67.3	6.87	1.17		
SS4-17		17			53	68	76					288	29.4	16.9	1.72	76.9	7.85	1.34		
SS4-18		18			55	72	80					314	32.0	19.2	1.96	87.2	8.89	1.50		
SS4-19		19			60	76	84					341	34.8	21.7	2.21	98.1	10.0	1.72		
SS4-20		20			65	80	88					368	37.5	24.3	2.48	110	11.2	1.95		
SS4-21		21			69	84	92					395	40.3	27.1	2.76	122	12.4	2.18		
SS4-22		22			73	88	96					423	43.1	30.1	3.06	135	13.8	2.42		
SS4-23		23			77	92	100					450	45.9	33.2	3.38	148	15.1	2.67		
SS4-24		24			80	96	104					478	48.8	36.4	3.72	163	16.6	2.91		
SS4-25		25			84	100	108					506	51.6	39.9	4.07	178	18.1	3.19		
SS4-26		26			87	104	112					534	54.5	43.3	4.42	192	19.6	3.45		
SS4-27		27			90	108	116					563	57.4	46.9	4.78	208	21.2	3.73		
SS4-28		28			95	112	120					591	60.3	50.6	5.16	224	22.8	4.06		
SS4-29		29			95	116	124					620	63.2	54.5	5.56	241	24.5	4.28		
SS4-30		30			100	120	128					649	66.2	58.7	5.98	258	26.3	4.64		
SS4-32		32			100	128	136					707	72.1	67.4	6.87	294	30.0	4.86		
SS4-34		34			22	100	136					144	766	78.1	76.7	7.82	333	33.9	5.38	
SS4-35		35					140					148	795	81.1	81.6	8.32	353	36.0	5.65	
SS4-36		36					144					152	825	84.1	86.7	8.84	374	38.1	5.93	
SS4-38		38					152					160	884	90.1	97.3	9.92	418	42.6	6.52	
SS4-40		40	25	100	160	168	943	96.2	109	11.1	464	47.3	7.08							
SS4-42		42			168	176	1000	102	120	12.3	512	52.2	7.73							
SS4-44		44			176	184	1060	108	133	13.6	563	57.4	8.41							
SS4-45		45			180	188	1090	112	139	14.2	590	60.1	8.76							
SS4-46		46	S2	30	184	192	1120	115	146	14.9	617	62.9	9.12							
SS4-48		48			192	200	987	101	133	13.6	528	53.9	9.12							
SS4-50		50			200	208	158	1040	106	146	14.8	575	58.6	9.60						
SS4-52		52			208	216	165	1090	111	158	16.1	624	63.7	10.2						
SS4-54		54	16	56	216	224	175	1140	116	172	17.5	676	68.9	10.8						
SS4-55		55			220	228	178	1160	119	179	18.2	702	71.6	11.1						
SS4-56		56			224	232	182	1190	121	186	18.9	729	74.3	11.5						
SS4-58		58			232	240	190	1240	127	200	20.4	785	80.0	12.5						
SS4-60		60	20	110	240	248	198	1290	132	215	22	842	85.9	13.2						
SS4-62		62			248	256	210	1340	137	231	23.6	902	92.0	13.1						
SS4-64		64			256	264	214	1390	142	248	25.2	964	98.3	13.4						
SS4-65		65			260	268	218	1420	145	256	26.1	996	102	13.7						
SS4-66		66	16	120	264	272	220	1450	148	265	27	1030	105	14.7						
SS4-68		68			272	280	225	1500	153	282	28.8	1090	112	15.5						
SS4-70		70			280	288	(248)	1550	158	300	30.6	1160	119	16.06						
SS4-80		80			320	328	(288)	1810	184	400	40.8	1540	157	19.26						
SS4-90S		90	S1	40	180	360	368	40	16	56	—	—	1910	195	467	47.6	—	—	34.6	
SS4-100S		100			200	400	408						2150	219	586	59.7	—	—	52.0	
SS4-110S		110			220	440	448						2390	244	720	73.4	—	—	42.9	
SS4-120S		120			240	480	488						2630	269	869	88.6	—	—	62.0	

[半订制产品的注意事项] 详情请参考第 38 ~ 40 页。

孔径 H7	* 表中颜色与 J 系列形状图的截面颜色相对应。													
键槽 Js9	20	22	25	28	30	32	35	40	45	50	55	60	65	
螺孔尺寸	6 × 2.8		8 × 3.3			10 × 3.3		12 × 3.3	14 × 3.8		16 × 4.3	18 × 4.4		
产品型号	M5		M6			M8			M10		M12			
SS4-12														
SS4-13														
SS4-14 J 孔径	※ S1K	S1K												
SS4-15 J 孔径	※ S1K	S1K	S1K											
SS4-16 J 孔径	※ S1K	S1K	S1K	S1K	S1K									
SS4-17 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K								
SS4-18 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SS4-19 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SS4-20 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SS4-21 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SS4-22 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SS4-23 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SS4-24 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS4-25 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS4-26 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS4-27 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SS4-28 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SS4-29 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SS4-30 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS4-32 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS4-34 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS4-35 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS4-36 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS4-38 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS4-40 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS4-42 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS4-44 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS4-45 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS4-46 J 孔径			※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS4-48 J 孔径			※ S2K	S2K		S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-50 J 孔径					※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-52 J 孔径					※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-54 J 孔径					※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-55 J 孔径					※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-56 J 孔径					※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-58 J 孔径					※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-60 J 孔径					※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-62 J 孔径					※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-64 J 孔径					※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-65 J 孔径					※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-66 J 孔径					※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-68 J 孔径					※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-70 J 孔径					※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-80 J 孔径					※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS4-90SJ 孔径								S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	
SS4-100SJ 孔径								S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	
SS4-110SJ 孔径								S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	
SS4-120SJ 孔径								S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	

J 系列淬火+的产品型号为
标准品型号 + H + J + 孔径。
例：SS4-14HJ22



「※」表示原孔径产品，非淬火+对象产品。淬火+详细内容请参考第 22 页。

产品形状已经改变。有关新产品形状的详细信息，请联系 KHK。




共 通 规 格	
精度等级	JIS N8 级 (JIS B 1702-1 : 1998) *
齿 形	全齿高齿
压 力 角	20°
材 料	S45C
热 处 理	—
齿面硬度	(194HB 以下)
表面处理	黑色表面氧化 (半订制产品除外)
侧 隙	0.20 ~ 0.44

* J系列产品的精度相当于表记精度。

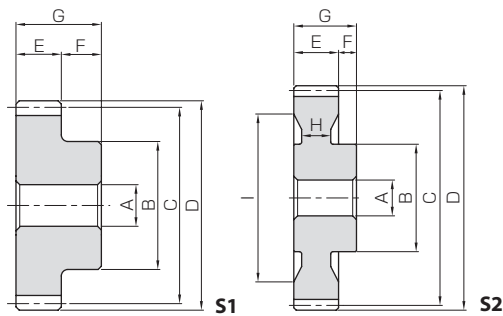

* FD 是锻造加工面。

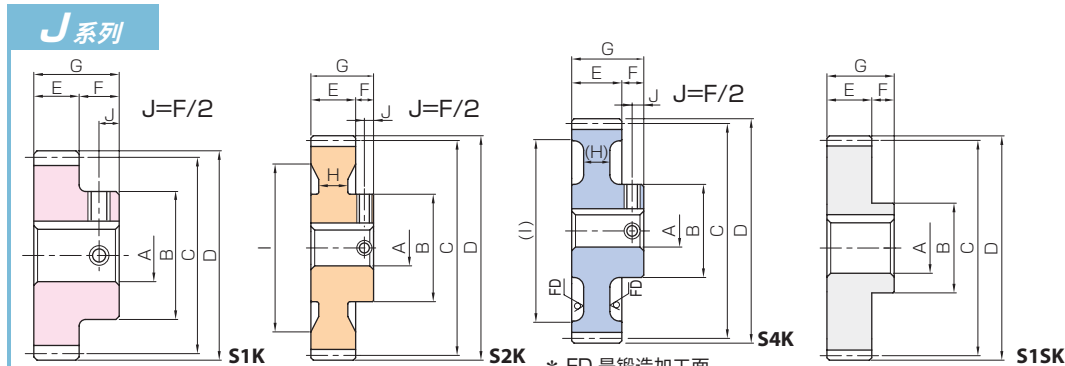

* FD 是锻造加工面。

H 淬火 + 产品型号为**标准品型号 + H**。

例：SS5-12H

产品型号		齿数	形状	孔径	轮鞍径	分度圆		齿顶圆直径	齿宽	轮鞍长	全长	腹板厚	轮缘径	容许转矩						质量 (kg)						
						弯曲强度	齿面强度							齿面强度 												
A _{H7}	B	C	D	E	F	G	(H)	(I)	N·m	kgf·m	N·m	kgf·m	N·m	kgf·m												
SS5-12		12	S1	22	46	60	70	50	25	75	—	—	254	25.9	15.2	1.55	69.7	7.11	1.21							
SS5-13		13			50	65	75						327	33.4	18.4	1.88	84.0	8.57	1.46							
SS5-14		14			52	70	80						412	42.0	21.8	2.22	99.1	10.1	1.70							
SS5-15		15			60	75	85						462	47.1	25.5	2.60	115	11.8	2.07							
SS5-16		16			65	80	90						512	52.2	29.5	3.01	133	13.6	2.40							
SS5-17		17			68	85	95						562	57.3	33.8	3.45	152	15.5	2.72							
SS5-18		18			70	90	100						614	62.6	38.4	3.92	172	17.6	3.03							
SS5-19		19			76	95	105						666	67.9	43.4	4.42	194	19.8	3.45							
SS5-20		20			82	100	110						718	73.3	48.6	4.96	217	22.1	3.90							
SS5-21		21			90	105	115						772	78.7	54.2	5.53	241	24.5	4.36							
SS5-22		22	S1	25	95	110	120	50	21	71	—	—	825	84.1	60.1	6.13	266	27.1	4.83							
SS5-23		23			100	115	125						879	89.7	66.3	6.77	293	29.9	5.33							
SS5-24		24			100	120	130						934	95.2	73.0	7.45	321	32.7	5.69							
SS5-25		25			105	125	135						989	101	80.0	8.16	350	35.7	6.23							
SS5-26		26			110	130	140						1040	106	87.1	8.88	379	38.7	6.79							
SS5-27		27			110	135	145						1100	112	94.4	9.62	410	41.8	7.19							
SS5-28		28			110	140	150						1160	118	102	10.4	441	45.0	7.62							
SS5-29		29			115	145	155						1210	124	110	11.2	474	48.4	8.23							
SS5-30		30			120	150	160						1270	129	118	12.1	508	51.8	8.87							
SS5-32		32			120	160	170						1380	141	136	13.8	580	59.1	9.36							
SS5-34		34	S2	30	120	170	180	50	21	71	36	160	1500	153	154	15.7	656	66.9	10.4							
SS5-35		35			120	175	185						1550	158	164	16.7	696	71.0	10.9							
SS5-36		36			120	180	190						1610	164	174	17.8	737	75.1	11.5							
SS5-38		38			120	190	200						1730	176	195	19.9	823	83.9	12.6							
SS5-40		40			120	200	210						1540	157	182	18.5	719	73.3	13.2							
SS5-42		42			120	210	220						36	170	1630	167	202	20.6	796	81.2	14.2					
SS5-44		44			120	220	230						36	175	1730	177	223	22.8	878	89.5	15.4					
SS5-45		45			120	225	235						36	185	1780	182	234	23.9	920	93.8	15.8					
SS5-46		46			120	230	240						30	185	1830	187	246	25.1	963	98.2	16.2					
SS5-48		48			120	240	250						30	200	1930	197	269	27.5	1050	107	17.0					
SS5-50		50	S2	40	120	250	260	50	21	71	(16)	(212)	2030	207	294	30.0	1150	117	20.74							
SS5-52		52			130	260	270						30	220	2130	217	320	32.6	1250	127	19.8					
SS5-54		54			130	270	280						30	230	2220	227	347	35.4	1350	137	20.9					
SS5-55		55			130	275	285						30	235	2270	232	361	36.8	1400	143	21.5					
SS5-56		56			130	280	290						30	240	2320	237	375	38.3	1450	148	22.0					
SS5-58		58			130	290	300						30	240	2420	247	405	41.3	1570	160	23.8					
SS5-60		60			130	300	310						30	250	2520	257	435	44.4	1680	171	25.1					
SS5-62S		62			S1	40	160						310	320	50	21	71	—	—	2420	247	423	43.1			32.2
SS5-64S		64					160						320	330						2520	257	453	46.2			34.2
SS5-65S		65					160						325	335						2560	261	468	47.7			35.2
SS5-66S		66	170	330			340	2610	266	484	49.3			36.6												
SS5-68S		68	170	340			350	2700	275	516	52.6			38.7												
SS5-70S		70	S1	40	180	350	360	50	21	71	—	—	2790	285	549	56.0	—	—	41.3							
SS5-80S		80			200	400	410						3260	333	732	74.7			53.8							
SS5-90S		90			230	450	460						3730	380	944	96.3			68.6							
SS5-100S		100			250	500	510						4200	428	1190	121			84.5							
SS5-110S		110			280	550	560						4670	476	1460	149			103							
SS5-120S		120			300	600	610						4780	487	1640	167			122							

[半订制产品的注意事项] 详情请参考第 38 ~ 40 页。

J系列产品型号为**标准品型号 + J + 孔径**

例：SS5-13J22

孔径 H7	* 表中颜色与 J 系列形状图的截面颜色相对应。															
键槽 Js9	22	25	28	30	32	35	40	45	50	55	60	65	70	75	80	85
螺孔尺寸	6×2.8	8×3.3			10×3.3		12×3.3	14×3.8		16×4.3	18×4.4		20×4.9		22×5.4	
产品型号	M5	M6			M8			M10			M12			M16		
SS5-12																
SS5-13 J 孔径	※ S1K															
SS5-14 J 孔径	※ S1K	S1K	S1K	S1K												
SS5-15 J 孔径	※ S1K	S1K	S1K	S1K	S1K											
SS5-16 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K										
SS5-17 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SS5-18 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SS5-19 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SS5-20 J 孔径	※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SS5-21 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SS5-22 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SS5-23 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SS5-24 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS5-25 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS5-26 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS5-27 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS5-28 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS5-29 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SS5-30 J 孔径		※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS5-32 J 孔径				※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS5-34 J 孔径				※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS5-35 J 孔径				※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS5-36 J 孔径				※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS5-38 J 孔径				※ S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS5-40 J 孔径				※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS5-42 J 孔径				※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS5-44 J 孔径				※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS5-45 J 孔径				※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS5-46 J 孔径				※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS5-48 J 孔径				※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	
SS5-50 J 孔径				※ S4K	S4K	S4K	S4K	S4K	S4K	S4K	S4K	S4K	S4K	S4K	S4K	
SS5-52 J 孔径				※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS5-54 J 孔径				※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS5-55 J 孔径				※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS5-56 J 孔径				※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS5-58 J 孔径				※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS5-60 J 孔径				※ S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS5-62SJ 孔径				S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS5-64SJ 孔径				S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS5-65SJ 孔径				S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS5-66SJ 孔径				S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS5-68SJ 孔径				S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS5-70SJ 孔径				S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS5-80SJ 孔径				S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS5-90SJ 孔径							S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS5-100SJ 孔径							S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS5-110SJ 孔径							S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS5-120SJ 孔径							S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK

J 系列淬火+的产品型号为
标准品型号+H+J+孔径。
例：SS5-14HJ25




「※」表示原孔径产品，非淬火+对象产品。淬火+详细内容请参考第 22 页。

产品形状已经改变。有关新产品形状的详细信息，请联系 KHK。




共 通 规 格	
精度等级	JIS N8 级 (JIS B 1702-1:1998) *
齿 形	全齿高齿
压 力 角	20°
材 料	S45C
热 处 理	—
齿面硬度	(194HB 以下)
表面处理	黑色表面氧化 (半订制产品除外)
侧 隙	0.22 ~ 0.48

* J系列产品的精度相当于表记精度。

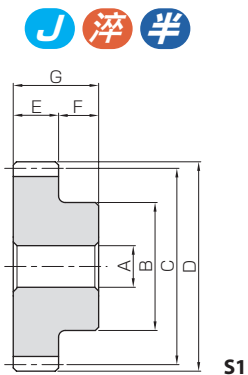

S1

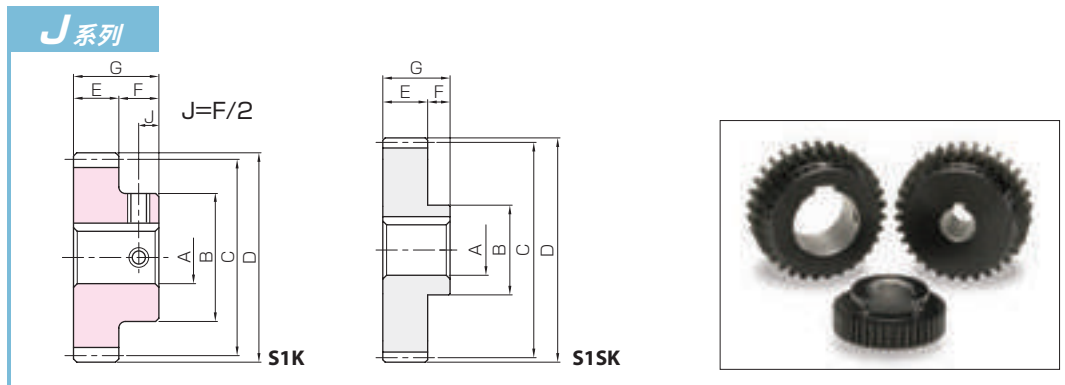

S1SK

H 淬火 + 产品型号为**标准品型号 + H**。

例：SS6-12H

产品型号		齿数	形状	孔径	轮毂径	分度圆直径	齿顶圆直径	齿宽	轮毂长	全长	腹板厚	轮缘径	容许转矩						质量 (kg)
													弯曲强度		齿面强度		齿面强度 		
													N·m	kgf·m	N·m	kgf·m	N·m	kgf·m	
SS6-12		12	S1	25	55	72	84	60	28	88	—	—	439	44.8	26.8	2.73	122	12.4	2.10
SS6-13		13			58	78	90						566	57.7	32.4	3.31	147	14.9	2.49
SS6-14		14			60	84	96						711	72.5	38.4	3.92	173	17.6	2.89
SS6-15		15			70	90	102						798	81.4	44.9	4.58	201	20.5	3.50
SS6-16		16			75	96	108						884	90.2	52.0	5.30	232	23.7	4.04
SS6-17		17			78	102	114						972	99.1	59.6	6.07	265	27.0	4.56
SS6-18		18			80	108	120						1060	108	67.7	6.90	300	30.6	5.08
SS6-19		19			90	114	126						1150	117	76.4	7.79	338	34.4	5.87
SS6-20		20			100	120	132						1240	127	85.9	8.75	377	38.5	6.71
SS6-21		21			105	126	138						1330	136	95.9	9.78	419	42.7	7.35
SS6-22		22		28	110	110	132		144	1430			145	107	10.9	463	47.3	8.11	
SS6-23		23				115	138		150	1520			155	118	12.0	510	52.0	8.90	
SS6-24		24				120	144		156	1610			165	129	13.2	559	57.0	9.73	
SS6-25		25				125	150		162	1710			174	142	14.5	610	62.2	10.6	
SS6-26		26				130	156		168	1800			184	154	15.7	661	67.4	11.5	
SS6-27		27				135	162		174	1900			194	167	17.0	713	72.7	12.4	
SS6-28		28		30	140	140	168		180	2000			204	181	18.4	768	78.3	13.4	
SS6-30		30				150	180		192	2190			223	209	21.3	884	90.2	15.4	
SS6-32		32				150	192		204	1990			203	200	20.4	792	80.8	16.4	
SS6-34		34				150	204		216	2150			220	228	23.2	899	91.7	18.1	
SS6-35		35				150	210		222	2240			228	242	24.7	955	97.4	19.0	
SS6-36		36				150	216		228	2320			237	258	26.3	1010	103	20.0	
SS6-38		38		40	150	150	228		240	2490			254	289	29.5	1130	116	22.0	
SS6-40		40				150	240		252	2650			271	323	33.0	1260	129	24.0	
SS6-42		42				150	252		264	2820			288	359	36.6	1400	143	25.9	
SS6-44		44	150			264	276	2990	305	397	40.5	1540	157	28.2					
SS6-45		45	180			270	282	3080	314	416	42.5	1620	165	30.7					
SS6-46		46	180			276	288	3160	322	436	44.5	1690	173	32.0					
SS6-48		48	40	150	180	288	300	3330	340	478	48.8	1850	189	34.5					
SS6-50		50			180	300	312	3500	357	522	53.2	2020	206	37.1					
SS6-52S		52	S1	40	180	312	324	60	23	83	—	—	3390	346	515	52.5	—	—	39.8
SS6-54S		54			180	324	336						3550	362	558	56.9			42.6
SS6-55S		55			180	330	342						3630	370	581	59.2			44.1
SS6-56S		56			180	336	348						3710	378	603	61.5			45.5
SS6-58S		58			180	348	360						3870	394	651	66.4			48.6
SS6-60S		60			180	360	372						4030	411	700	71.4			51.7
SS6-62S		62			190	372	384						4190	427	751	76.6			55.5
SS6-64S		64			190	384	396						4350	443	804	82.0			58.9
SS6-65S		65			200	390	402						4430	451	832	84.8			61.1
SS6-66S		66			200	396	408						4510	460	860	87.7			62.9
SS6-68S		68		200	408	420	4670		476	917			93.5	66.4					
SS6-70S		70		210	420	432	4830		492	976			99.5	70.7					
SS6-80S		80		240	480	492	5630		575	1300			133	92.6					
SS6-90S		90		270	540	552	6440		657	1680			172	117					
SS6-100S		100		300	600	612	6740		687	1970			200	145					

[半订制产品的注意事项] 详情请参考第 38 ~ 40 页。

J系列产品型号为**标准品型号 + J + 孔径**

例：SS6-12J25

[illegible]

「※」表示原孔径产品，非淬火+对象产品。淬火+详细内容请参考第 22 页。

直齿轮

斜齿轮

内齿轮

齿条

& C
小 P 齿条

等径锥齿轮

锥齿轮

交错轴斜齿轮

蜗轮蜗杆

齿轮箱


其他产品



共 通 规 格	
精度等级	JIS N8 级 (JIS B 1702-1 : 1998)
齿 形	全齿高齿
压 力 角	20°
材 料	S45C
热 处 理	—
齿 面 硬 度	(194HB 以下)
表 面 处 理	黑色表面氧化 (半订制产品除外)


* J 系列产品的精度相当于表记精度。

J 半




S1

J 系列



S1K



S1SK



直齿轮

斜齿轮

内齿轮

齿条

& C
小 P 齿条

等径锥齿轮

锥齿轮

交错轴斜齿轮

蜗轮蜗杆

齿轮箱


其他产品

产品型号	齿数	形状	孔径	轮毂径	分度圆直径	齿顶圆直径	齿宽	轮毂长	全长	腹板厚	轮缘径	容许转矩 (N · m)		容许转矩 (kgf·m)		侧隙 (mm)	质量 (kg)
			A _{H7}	B	C	D	E	F	G	H	I	弯曲强度	齿面强度	弯曲强度	齿面强度		
SS8-12	12	S1	28	75	96	112	75	35	110	—	—	975	62.6	99.5	6.39	0.28~0.58	4.94
SS8-13	13			80	104	120						1260	75.2	128	7.66		5.85
SS8-14	14			85	112	128						1580	88.9	161	9.06		6.83
SS8-15	15			90	120	136						1770	104	181	10.6		7.87
SS8-16	16			100	128	144						1970	121	200	12.3		9.20
SS8-17	17			105	136	152						2160	139	220	14.1		10.4
SS8-18	18			110	144	160						2360	158	240	16.1		11.7
SS8-19	19			120	152	168						2560	178	261	18.2		13.3
SS8-20	20			130	160	176						2760	200	281	20.4		15.0
SS8-21	21			140	168	184						2960	223	302	22.8		16.7
SS8-22	22	30	30	150	176	192	75	35	110	—	—	3170	248	323	25.3	0.28~0.58	18.6
SS8-23	23			155	184	200						3380	273	344	27.9		20.2
SS8-24	24			160	192	208						2990	250	305	25.5		22.0
SS8-25	25			170	200	216						3160	273	323	27.8		24.1
SS8-26	26			170	208	224						3340	297	341	30.3		25.6
SS8-27	27			170	216	232						3520	322	359	32.8		27.2
SS8-28	28			180	224	240						3700	348	377	35.5		29.6
SS8-30	30			180	240	256						4060	404	414	41.2		33.0
SS8-32S	32	S1	40	200	256	272	75	35	110	—	—	4080	421	416	42.9	0.28~0.58	37.9
SS8-34S	34			210	272	288						4420	479	451	48.9		42.6
SS8-35S	35			210	280	296						4590	510	468	52.0		44.7
SS8-36S	36			210	288	304						4760	542	486	55.3		46.8
SS8-38S	38			220	304	320						5100	608	520	62.0		52.1
SS8-40S	40			220	320	336						5450	679	555	69.3		56.7
SS8-42S	42			230	336	352						5790	754	591	76.9		62.5
SS8-44S	44			230	352	368						6140	834	626	85.0		67.6
SS8-45S	45			230	360	376						6310	875	644	89.2		70.3
SS8-46S	46			240	368	384						6490	917	662	93.6		74.0
SS8-48S	48			240	384	400						6840	1010	697	103		79.5
SS8-50S	50			240	400	416						7190	1100	733	112		85.3
SS8-52S	52			240	416	432						7540	1200	769	122		91.4
SS8-54S	54			240	432	448						7890	1300	805	132		97.6
SS8-55S	55			240	440	456						8070	1350	823	138		101
SS8-56S	56			240	448	464						8240	1400	841	143		104
SS8-58S	58			240	464	480						8600	1510	877	154		111
SS8-59S	59			240	472	488						8770	1570	895	160		114
SS8-60S	60			240	480	496						8950	1630	913	166		118



[半订制产品的注意事项] 详情请参考第 38 ~ 40 页。

J 系列产品型号为标准品型号 + J + 孔径

孔径 H7	* 表中颜色与 J 系列形状图的截面颜色相对应。																							
键槽 Js9	28	30	32	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	120	130	140		
螺孔尺寸	8 × 3.3	10 × 3.3	12 × 3.3	14 × 3.8	16 × 4.3	18 × 4.4	20 × 4.9	22 × 5.4	25 × 5.4	28 × 6.4	32 × 7.4	36 × 8.4												
产品型号	M6		M8		M10		M12		M16			M20					M24							
SS8-12 J 孔径	S1K	S1K	S1K	S1K	S1K																			
SS8-13 J 孔径	S1K	S1K	S1K	S1K	S1K	S1K																		
SS8-14 J 孔径	S1K	S1K	S1K	S1K	S1K	S1K																		
SS8-15 J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K																	
SS8-16 J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K																	
SS8-17 J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K																	
SS8-18 J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																
SS8-19 J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K														
SS8-20 J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K														
SS8-21 J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K												
SS8-22 J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
SS8-23 J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SS8-24 J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SS8-25 J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SS8-26 J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SS8-27 J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SS8-28 J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SS8-30 J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SS8-32SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-34SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-35SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-36SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-38SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-40SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-42SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-44SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-45SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-46SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-48SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-50SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-52SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-54SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-55SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-56SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-58SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-59SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS8-60SJ 孔径					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		



J 系列



共 通 规 格	
精度等级	JIS N8 级 (JIS B 1702-1 : 1998)
齿 形	全齿高齿
压 力 角	20°
材 料	S45C
热 处 理	—
齿 面 硬 度	(194HB 以下)
表 面 处 理	黑色表面氧化 (半订制产品除外)

* J 系列产品的精度相当于表记精度。

产品型号	齿数	形状	孔径		分度圆直径	齿顶圆直径	齿宽	轮毂长	全长	腹板厚	轮缘径	容许转矩 (N · m)		容许转矩 (kgf·m)		侧隙 (mm)	质量 (kg)
			A _{H7}	B								弯曲强度	齿面强度	弯曲强度	齿面强度		
SS10-15	15	S1	30	115	150	170	90	40	130	—	—	3330	203	339	20.7	0.34~0.68	15.0
SS10-20	20		30	165	200	220						4310	323	440	33.0		28.2
SS10-25	25		40	200	250	270						5930	529	605	54.0		43.3

产品型号	齿数	形状	孔径		分度圆直径	齿顶圆直径	齿宽	轮毂长	全长	腹板厚	轮缘径	容许转矩 (N · m)		容许转矩 (kgf·m)		侧隙 (mm)	质量 (kg)
			A _{H7}	B								弯曲强度	齿面强度	弯曲强度	齿面强度		
SS10-26S	26	S1	50	210	260	280	90	40	130	—	—	5790	522	590	53.3	0.34~0.68	46.4
SS10-27S	27			220	270	290						6100	566	622	57.7		50.4
SS10-28S	28			220	280	300						6400	612	653	62.4		53.4
SS10-29S	29			230	290	310						6720	660	685	67.3		57.7
SS10-30S	30			240	300	320						7030	710	717	72.4		62.1
SS10-32S	32			250	320	340						7660	815	781	83.1		70.2
SS10-34S	34			260	340	360						8290	929	845	94.7		78.8
SS10-35S	35			260	350	370						8610	988	878	101		82.6
SS10-36S	36			270	360	380						8930	1050	910	107		87.9
SS10-38S	38			270	380	400						9570	1180	976	120		96.1
SS10-40S	40			280	400	420						10200	1320	1040	134		106
SS10-42S	42			290	420	440						10900	1460	1110	149		117
SS10-44S	44			290	440	460						11500	1620	1170	165		126
SS10-45S	45			290	450	470						11800	1700	1210	173		131
SS10-46S	46			290	460	480						12200	1780	1240	182		136
SS10-48S	48			300	480	500						12800	1950	1310	199		148
SS10-50S	50			300	500	520						13500	2140	1370	218		159

[半订制产品的注意事项] 详情请参考第 38 ~ 40 页。

J 系列产品型号为标准品型号 + J + 孔径

孔径 H7	* 表中颜色与 J 系列形状图的截面颜色相对应。																		
键槽 J _{s9}	30	32	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	
螺孔尺寸	8×3.3	10×3.3	12×3.3	14×3.8	16×4.3	18×4.4	20×4.9	22×5.4	25×5.4	28×6.4	32×7.4	36×8.4	40×9.4	45×10.4	50×11.4	55×12.4	60×13.4	65×14.4	70×15.4
产品型号	M6	M8		M10		M12		M16		M20		M25		M32		M40		M50	
SS10-15 J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS10-20 J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS10-25 J 孔径				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K

孔径 H7	* 表中颜色与 J 系列形状图的截面颜色相对应。																											
键槽 J _{s9}	50	55	60	65	70	75	80	85	90	95	100	105	110	120	130	140	150	160	170	180	190	200						
产品型号	14×3.8	16×4.3	18×4.4	20×4.9	22×5.4	25×5.4	28×6.4	32×7.4	36×8.4	40×9.4	45×10.4	50×11.4	55×12.4	60×13.4	65×14.4	70×15.4	75×16.4	80×17.4	85×18.4	90×19.4	95×20.4	100×21.4	105×22.4	110×23.4	115×24.4	120×25.4	125×26.4	130×27.4
SS10-26SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-27SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-28SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-29SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-30SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-32SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-34SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-35SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-36SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-38SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-40SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-42SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-44SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-45SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-46SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-48SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-50SJ 孔径	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK

