





共通规格	
精度等级	JIS NB 级 (JIS B 1702-1 : 1998) *
齿形	全齿高齿
压力角	20°
材料	SUS303
热处理	—
齿面硬度	(187HB 以下)

\* J 系列产品的精度相当于表记精度。

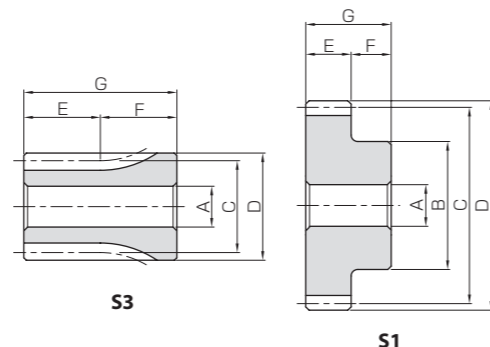


J 系列

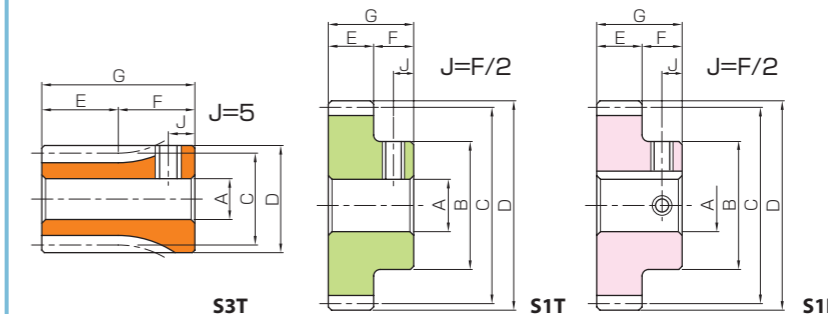

J 系列产品型号为标准品型号 + J + 孔径

产品型号	齿数	形状	孔径 A <sub>H7</sub>	轮毂径 B	分度圆直径 C	齿顶圆直径 D	齿宽 E	轮毂长 F	全长 G	容许转矩 (N·m)		容许转矩 (kgf·m)		侧隙 (mm)	质量 (kg)
										弯曲强度	齿面强度	弯曲强度	齿面强度		
SUS1-15	15	S3	8	17	15	17	10	20	30	2.04	0.12	0.21	0.013	0.08~0.18	0.038
SUS1-16	16			18	16	18				2.26	0.14	0.23	0.015		0.044
SUS1-18	18			20	18	20				2.71	0.18	0.28	0.019		0.058
SUS1-20	20			16	20	22				3.18	0.23	0.32	0.024		0.033
SUS1-22	22			18	22	24				3.65	0.29	0.37	0.029		0.042
SUS1-24	24			20	24	26				4.13	0.35	0.42	0.036		0.053
SUS1-25	25			20	25	27				4.37	0.38	0.45	0.039		0.056
SUS1-28	28			23	28	30				5.11	0.48	0.52	0.049		0.074
SUS1-30	30	25	30	32	5.60	0.56	0.57	0.057	0.087						
SUS1-32	32	26	32	34	6.11	0.64	0.62	0.066	0.098						
SUS1-35	35	S1	10	26	35	37	10	20	20	6.87	0.78	0.70	0.079	0.08~0.18	0.11
SUS1-36	36			28	36	38				7.12	0.82	0.73	0.084		0.12
SUS1-40	40			35	40	42				8.15	1.03	0.83	0.11		0.16
SUS1-42	42			35	42	44				8.66	1.14	0.88	0.12		0.17
SUS1-45	45			35	45	47				9.44	1.32	0.96	0.13		0.19
SUS1-48	48			35	48	50				10.2	1.51	1.04	0.15		0.21
SUS1-50	50			35	50	52				10.8	1.65	1.10	0.17		0.22
SUS1-55	55			40	55	57				12.1	2.01	1.23	0.21		0.28
SUS1-56	56			40	56	58				12.3	2.09	1.26	0.21		0.28
SUS1-60	60			40	60	62				13.4	2.42	1.37	0.25		0.31
SUS1-64	64			45	64	66				14.5	2.77	1.47	0.28		0.37
SUS1-70	70			50	70	72				16.1	3.34	1.64	0.34		0.45
SUS1-75	75	55	75	77	17.4	3.86	1.77	0.39	0.53						
SUS1-80	80	60	80	82	18.7	4.42	1.91	0.45	0.61						
SUS1-90	90	60	90	92	21.4	5.67	2.19	0.58	0.72						
SUS1-100	100	12	60	100	102	24.1	7.08	2.46	0.72	0.83					
SUS1-120	120		60	120	122	29.6	10.4	3.01	1.06	1.10					

孔径 H7	* 表中颜色与 J 系列形状图的截面颜色相对应。															
	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35
键槽 J69	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35
螺孔尺寸	—	4 × 1.8	5 × 2.3	6 × 2.8	8 × 3.3	10 × 3.3										
产品型号	M5	M4	M5	M6	M8											
SUS1-15J 孔径	S3T															
SUS1-16J 孔径	S3T															
SUS1-18J 孔径	S3T															
SUS1-20J 孔径	S1T															
SUS1-22J 孔径	S1T															
SUS1-24J 孔径	S1T															
SUS1-25J 孔径	S1T															
SUS1-28J 孔径	S1T	S1K	S1K													
SUS1-30J 孔径	S1T	S1K	S1K													
SUS1-32J 孔径	S1T	S1K	S1K	S1K												
SUS1-35J 孔径	S1T	S1K	S1K	S1K												
SUS1-36J 孔径	S1T	S1K	S1K	S1K	S1K	S1K										
SUS1-40J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SUS1-42J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SUS1-45J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SUS1-48J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SUS1-50J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SUS1-55J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SUS1-56J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SUS1-60J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SUS1-64J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SUS1-70J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SUS1-75J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SUS1-80J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SUS1-90J 孔径		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SUS1-100J 孔径			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SUS1-120J 孔径			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K





直齿轮  
斜齿轮  
内齿轮  
齿条  
& C P 小齿条  
等径锥齿轮  
锥齿轮  
交错轴斜齿轮  
蜗轮蜗杆  
齿轮箱  
其他产品

直齿轮  
斜齿轮  
内齿轮  
齿条  
& C P 小齿条  
等径锥齿轮  
锥齿轮  
交错轴斜齿轮  
蜗轮蜗杆  
齿轮箱  
其他产品



共通规格	
精度等级	JIS N8级 (JIS B 1702-1:1998)*
齿形	全齿高齿
压力角	20°
材料	SUS303
热处理	—
齿面硬度	(187HB以下)

\* J系列产品的精度相当于表记精度。

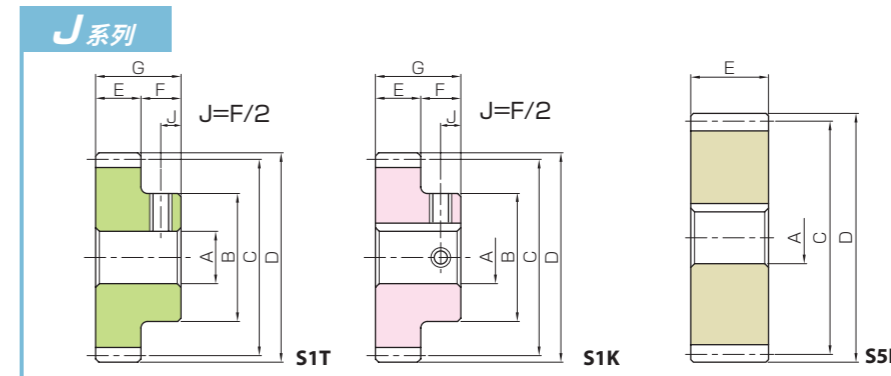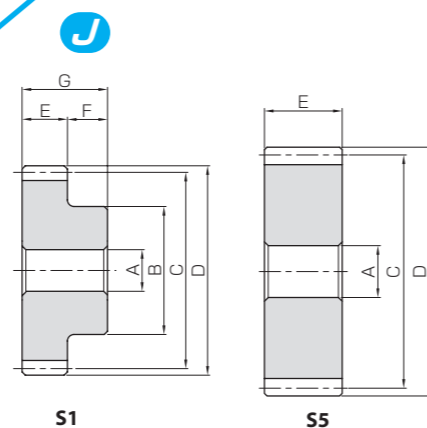

J系列产品型号为标准品型号 + J + 孔径

孔径 H7	*表中颜色与J系列形状图的截面颜色相对应。																															
	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50													
键槽 Js9	—				4 × 1.8				5 × 2.3				6 × 2.8				8 × 3.3				10 × 3.3				12 × 3.3				14 × 3.8			
螺孔尺寸	—				M5				M4				M5				M6				M8				M10				—			
产品型号	M5																															
SUS1.5-15J 孔径 S1T																																
SUS1.5-16J 孔径 S1T																																
SUS1.5-18J 孔径 S1T																																
SUS1.5-20J 孔径 S1T																																
SUS1.5-22J 孔径 S1T																																
SUS1.5-24J 孔径 S1T																																
SUS1.5-25J 孔径 S1T																																
SUS1.5-28J 孔径 S1T																																
SUS1.5-30J 孔径 S1T																																
SUS1.5-32J 孔径 S1T																																
SUS1.5-35J 孔径 S1T																																
SUS1.5-36J 孔径 S1T																																
SUS1.5-40J 孔径 S1T																																
SUS1.5-42J 孔径 S1T																																
SUS1.5-45J 孔径 S1T																																
SUS1.5-48J 孔径 S1T																																
SUS1.5-50J 孔径 S1T																																
SUS1.5-55J 孔径 S1T																																
SUS1.5-56J 孔径 S1T																																
SUS1.5-60J 孔径 S1T																																
SUS1.5-64J 孔径 S1T																																
SUS1.5-70J 孔径 S1T																																
SUS1.5-75J 孔径 S1T																																
SUS1.5-80J 孔径 S1T																																
SUS1.5-90J 孔径 S1T																																
SUS1.5-100J 孔径 S1T																																
SUS2-15J 孔径 S1K																																
SUS2-16J 孔径 S1K																																
SUS2-18J 孔径 S1K																																
SUS2-20J 孔径 S1K																																
SUS2-22J 孔径 S1K																																
SUS2-24J 孔径 S1K																																
SUS2-25J 孔径 S1K																																
SUS2-28J 孔径 S1K																																
SUS2-30J 孔径 S1K																																
SUS2-32J 孔径 S5K																																
SUS2-35J 孔径 S5K																																
SUS2-36J 孔径 S5K																																
SUS2-40J 孔径 S5K																																
SUS2-42J 孔径 S5K																																
SUS2-45J 孔径 S5K																																
SUS2-48J 孔径 S5K																																
SUS2-50J 孔径 S5K																																
SUS2-55J 孔径 S5K																																
SUS2-56J 孔径 S5K																																
SUS2-60J 孔径 S5K																																
SUS2-64J 孔径 S5K																																
SUS2-70J 孔径 S5K																																

产品型号	齿数	形状	孔径 AH7	分度圆直径			齿宽 E	轮毅长 F	全长 G	容许转矩 (N·m)		容许转矩 (kgf·m)		侧隙 (mm)	质量 (kg)				
				B	C	D				弯曲强度	齿面强度	弯曲强度	齿面强度						
SUS1.5-15	15	S1	8	18	22.5	25.5	15	14	29	6.89	0.43	0.70	0.044	0.064					
SUS1.5-16	16			20	24	27				7.63	0.50	0.78	0.051	0.077					
SUS1.5-18	18			22	27	30				9.16	0.65	0.93	0.066	0.099					
SUS1.5-20	20			24	30	33				10.7	0.82	1.09	0.084	0.12					
SUS1.5-22	22			26	33	36				12.3	1.01	1.26	0.10	0.15					
SUS1.5-24	24			28	36	39				13.9	1.23	1.42	0.13	0.18					
SUS1.5-25	25			30	37.5	40.5				14.8	1.35	1.50	0.14	0.20					
SUS1.5-28	28			36	42	45				17.2	1.71	1.76	0.17	0.26					
SUS1.5-30	30			38	45	48				18.9	1.98	1.93	0.20	0.30					
SUS1.5-32	32			40	48	51				20.6	2.27	2.10	0.23	0.34					
SUS1.5-35	35	S1	10	42	52.5	55.5	15	14	29	23.2	2.74	2.36	0.28	0.39					
SUS1.5-36	36			45	54	57				24.0	2.91	2.45	0.30	0.43					
SUS1.5-40	40			45	60	63				27.5	3.62	2.80	0.37	0.49					
SUS1.5-42	42			45	63	66				29.2	4.01	2.98	0.41	0.52					
SUS1.5-45	45			45	67.5	70.5				31.9	4.64	3.25	0.47	0.58					
SUS1.5-48	48			45	72	75				34.5	5.31	3.52	0.54	0.63					
SUS1.5-50	50			50	75	78				36.3	5.79	3.70	0.59	0.72					
SUS1.5-55	55			55	82.5	85.5				40.7	7.08	4.15	0.72	0.87					
SUS1.5-56	56			55	84	87				41.6	7.36	4.24	0.75	0.90					
SUS1.5-60	60			45.2	85.1	93				45.2	8.51	4.61	0.87	1.03					
SUS1.5-64	64	S1	12	60	96	99	15	14	29	48.8	9.75	4.97	0.99	1.13					
SUS1.5-70	70			70	105	108				54.2	11.8	5.52	1.20	1.42					
SUS1.5-75	75			70	112.5	115.5				58.7	13.6	5.99	1.39	1.57					
SUS1.5-80	80			80	120	123				63.2	15.6	6.45	1.59	1.86					
SUS1.5-90	90			80	135	138				72.3	20.1	7.37	2.05	2.22					
SUS1.5-100	100			80	150	153				81.4	25.2	8.30	2.57	2.62					
SUS2-15	15			S1	12	24				30	34	16	36	36	16.3	1.05	1.67	0.11	0.14
SUS2-16	16					26				32	36				18.1	1.22	1.85	0.12	0.16
SUS2-18	18					30				36	40				21.7	1.59	2.21	0.16	0.22
SUS2-20	20					32				40	44				25.4	2.01	2.59	0.20	0.27
SUS2-22	22	36	44			48	29.2	2.48	2.98	0.25	0.34								
SUS2-24	24	38	48			52	33.0	3.01	3.37	0.31	0.40								
SUS2-25	25	40	50			54	35.0	3.30	3.57	0.34	0.44								
SUS2-28	28	45	56			60	40.9	4.18	4.17	0.43	0.56								
SUS2-30	30	50	60			64	44.8	4.83	4.57	0.49	0.67								
SUS2-32	32	S5	15			64	68	72	20	—	—				48.9	5.53	4.98	0.56	0.48
SUS2-35	35			70	74	78	54.9	6.67				5.60	0.68	0.58					
SUS2-36	36			72	76	80	57.0	7.08				5.81	0.72	0.62					
SUS2-40	40			80	84	88	65.2	8.85				6.65	0.90	0.77					
SUS2-42	42			84	88	92	69.3	9.81				7.07	1.00	0.85					
SUS2-45	45			90	94	98	75.5	11.4				7.70	1.16	0.98					
SUS2-48	48			96	100	104	81.8	13.0				8.34	1.33	1.12					
SUS2-50	50			100	104	108	86.0	14.2				8.77	1.44	1.22					
SUS2-55	55			110	114	118	96.5	17.3				9.84	1.77	1.48					
SUS2-56	56			112	116	120	98.7	18.0				10.1	1.83	1.53					
SUS2-60	60	120	124	128	107	20.8	10.9	2.13	1.77										
SUS2-64	64	128	132	136	116	23.9	11.8	2.44	2.01										
SUS2-70	70	140	144	148	128	29.0	13.1	2.96	2.41										


直齿轮  
斜齿轮  
内齿轮  
齿条  
C P 小齿条  
等径锥齿轮  
锥齿轮  
交错轴斜齿轮  
蜗轮蜗杆  
齿轮箱  
其他产品

直齿轮  
斜齿轮  
内齿轮  
齿条  
C P 小齿条  
等径锥齿轮  
锥齿轮  
交错轴斜齿轮  
蜗轮蜗杆  
齿轮箱  
其他产品




共通规格	
精度等级	JIS N8级 (JIS B 1702-1:1998)*
齿形	全齿高齿
压力角	20°
材料	SUS303
热处理	—
齿面硬度	(187HB以下)

\* J系列产品的精度相当于表记精度。

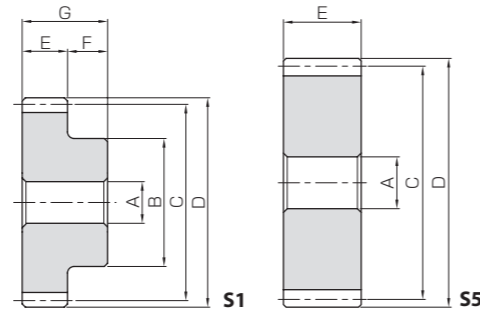

**J系列**

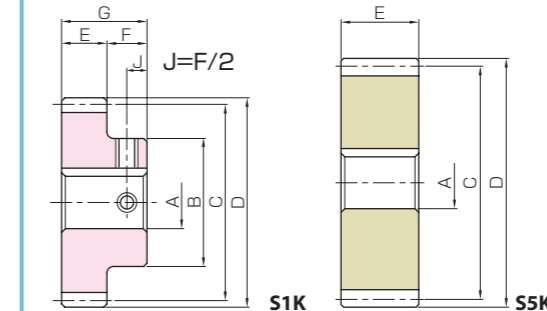

**J系列产品型号为标准品型号 + J + 孔径**

孔径 H7	*表中颜色与J系列形状图的截面颜色相对应。															
	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50	
键槽 J <sub>s9</sub>	5 × 2.3			6 × 2.8				8 × 3.3			10 × 3.3		12 × 3.3		14 × 3.8	
螺孔尺寸	M4			M5				M6			M8		M10			
产品型号																
SUS2.5-15J 孔径	S1K	S1K														
SUS2.5-16J 孔径	S1K	S1K	S1K													
SUS2.5-18J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SUS2.5-20J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SUS2.5-22J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SUS2.5-24J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SUS2.5-25J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SUS2.5-28J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SUS2.5-30J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SUSA2.5-32J 孔径	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K		
SUSA2.5-35J 孔径	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K		
SUSA2.5-36J 孔径	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K		
SUSA2.5-40J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA2.5-42J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA2.5-45J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA2.5-48J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA2.5-50J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA2.5-55J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA2.5-56J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA2.5-60J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA2.5-64J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUS3-15J 孔径	S1K	S1K	S1K	S1K	S1K											
SUS3-16J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SUS3-18J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SUS3-20J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SUS3-22J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SUS3-24J 孔径	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SUS3-25J 孔径						S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SUS3-28J 孔径						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SUS3-30J 孔径						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SUSA3-32J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K		
SUSA3-35J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K		
SUSA3-36J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K		
SUSA3-40J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA3-42J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA3-45J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA3-48J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA3-50J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA3-55J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA3-56J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUSA3-60J 孔径						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
SUS4-15J 孔径									S1K	S1K	S1K					
SUS4-20J 孔径									S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SUS4-25J 孔径									S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SUS4-30J 孔径									S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SUSA4-40J 孔径											S5K	S5K	S5K	S5K	S5K	
SUSA4-50J 孔径											S5K	S5K	S5K	S5K	S5K	

产品型号	齿数	形状	孔径 A <sub>H7</sub>	轮毂径 B	分度圆直径 C	齿顶圆直径 D	齿宽 E	轮毂长 F	全长 G	容许转矩 (N·m)		容许转矩 (kgf·m)		侧隙 (mm)	质量 (kg)
										弯曲强度	齿面强度	弯曲强度	齿面强度		
SUS2.5-15	15	S1	15	30	37.5	42.5	18	43		31.9	2.11	3.25	0.21	0.14~0.28	0.26
SUS2.5-16	16			32	40	45				35.3	2.44	3.60	0.25		0.30
SUS2.5-18	18			38	45	50				42.4	3.18	4.32	0.32		0.42
SUS2.5-20	20			40	50	55				49.6	4.02	5.06	0.41		0.51
SUS2.5-22	22			44	55	60				57.0	4.96	5.81	0.51		0.63
SUS2.5-24	24			48	60	65				64.5	6.01	6.58	0.61		0.76
SUS2.5-25	25			50	62.5	67.5				68.3	6.58	6.96	0.67		0.83
SUS2.5-28	28			60	70	75				79.8	8.34	8.14	0.85		1.11
SUS2.5-30	30			65	75	80				87.6	9.65	8.93	0.98		1.29
SUSA2.5-32	32			S5	20	80				85	25				
SUSA2.5-35	35	87.5	92.5			107	13.4	10.9	1.36	1.16					
SUSA2.5-36	36	90	95			111	14.2	11.3	1.45	1.23					
SUSA2.5-40	40	100	105			127	17.7	13.0	1.81	1.49					
SUSA2.5-42	42	105	110			135	19.6	13.8	2.00	1.65					
SUSA2.5-45	45	112.5	117.5			148	22.7	15.0	2.31	1.91					
SUSA2.5-48	48	120	125			160	26.1	16.3	2.66	2.18					
SUSA2.5-50	50	125	130			168	28.4	17.1	2.90	2.37					
SUSA2.5-55	55	137.5	142.5			189	34.9	19.2	3.56	2.88					
SUSA2.5-56	56	140	145			193	36.2	19.6	3.70	2.99					
SUSA2.5-60	60	150	155	209	42.0	21.3	4.28	3.44							
SUSA2.5-64	64	160	165	226	48.2	23.0	4.91	3.92							
SUS3-15	15	S1	15	36	45	51	20	50		55.1	3.71	5.62	0.38	0.14~0.32	0.47
SUS3-16	16			38	48	54				61.1	4.29	6.23	0.44		0.54
SUS3-18	18			40	54	60				73.3	5.59	7.47	0.57		0.67
SUS3-20	20			50	60	66				85.8	7.07	8.74	0.72		0.91
SUS3-22	22			54	66	72				98.5	8.73	10.0	0.89		1.11
SUS3-24	24			58	72	78				111	10.6	11.4	1.08		1.32
SUS3-25	25			60	75	81				118	11.6	12.0	1.18		1.37
SUS3-28	28			70	84	90				138	14.7	14.1	1.50		1.80
SUS3-30	30			75	90	96				151	17.0	15.4	1.74		2.09
SUSA3-32	32			S5	25	96				102	30				
SUSA3-35	35	105	111			185	23.6	18.9	2.40	1.99					
SUSA3-36	36	108	114			192	25.0	19.6	2.55	2.10					
SUSA3-40	40	120	126			220	31.3	22.4	3.19	2.57					
SUSA3-42	42	126	132			234	34.7	23.9	3.54	2.85					
SUSA3-45	45	135	141			255	40.2	26.0	4.10	3.29					
SUSA3-48	48	144	150			276	46.2	28.2	4.71	3.76					
SUSA3-50	50	150	156			290	50.4	29.6	5.14	4.09					
SUSA3-55	55	165	171			326	61.7	33.2	6.30	4.97					
SUSA3-56	56	168	174			333	64.1	33.9	6.54	5.16					
SUSA3-60	60	180	186	362	74.3	36.9	7.58	5.94							
SUS4-15	15	S1	20	45	60	68	40	25	65	131	9.06	13.3	0.92	0.18~0.38	1.05
SUS4-20	20			65	80	88				203	17.3	20.7	1.76		2.09
SUS4-25	25			84	100	108				280	28.3	28.5	2.89		3.43
SUS4-30	30			100	120	128				359	41.7	36.6	4.25		4.98
SUSA4-40	40	S5	30	160	168	40				521	77.1	53.2	7.86	0.18~0.38	6.15
SUSA4-50	50			200	208					573	103	58.5	10.5		9.74

直齿轮  
斜齿轮  
内齿轮  
齿条  
C P 小齿条  
等径锥齿轮  
锥齿轮  
交错轴斜齿轮  
蜗轮蜗杆  
齿轮箱  
其他产品

直齿轮  
斜齿轮  
内齿轮  
齿条  
C P 小齿条  
等径锥齿轮  
锥齿轮  
交错轴斜齿轮  
蜗轮蜗杆  
齿轮箱  
其他产品